

ORDER THE EXPLANATION

訂購說明

CSE 04 - 2N - ** - A *

※1 ※2 ※3

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)
D: Nodular Ductile-Iron (Galvanization)
S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)
D: 球墨鑄鐵(鍍鋅)
S: 鋼質(鍍鋅)

CAVITY 孔口

CSE 04-2N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CSE04-2N-** -A

1


SAE16

1.70
(3.75 lbs)

CSE04-2N-** -B

1-1/4

SAE20

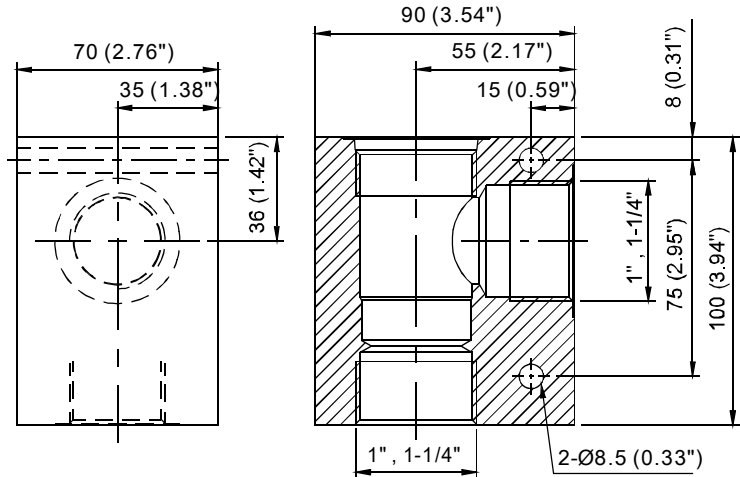

CAVITY 孔口

CSE017-2N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CSE017-2N-** -A

1/2


SAE8

0.45
(0.99 lbs)

CSE017-2N-** -B

3/4

SAE12

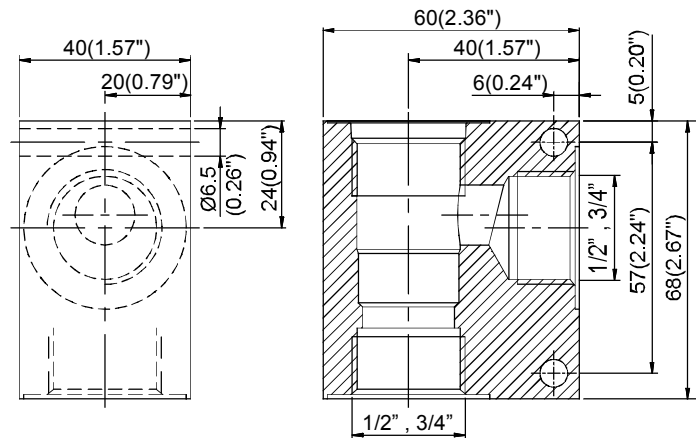

CAVITY 孔口

CSE019-2N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CSE019-2N-** -A

1/4


SAE4

0.20
(0.44 lbs)

CSE019-2N-** -B

3/8

SAE6

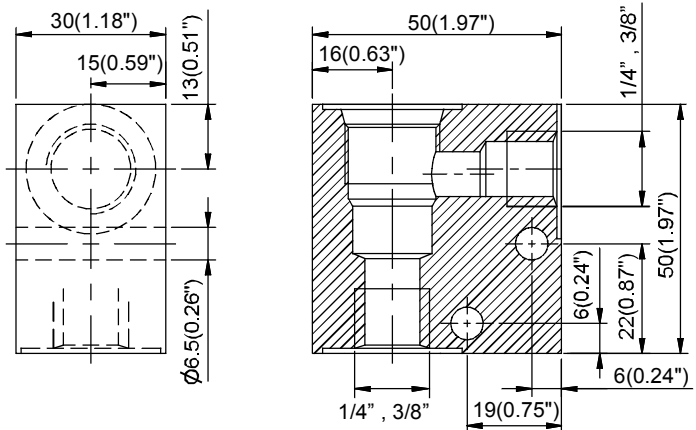

MAX.PRESSURE

3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註: 標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊, 請聯繫工廠。

STANDARD MANIFOLDS

CSEXXX-2N

標準油路板



ORDER THE EXPLANATION

訂購說明

CSE021 - 2N - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D: Nodular Ductile-Iron (Galvanization)

S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)

D: 球墨鑄鐵(鍍鋅)

S: 鋼質(鍍鋅)



CAVITY 孔口

CSE021-2N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CSE021-2N-**-A	3/4	0.86 (1.90 lbs)
	SAE 12	
CSE021-2N-**-B	1	
	SAE 16	

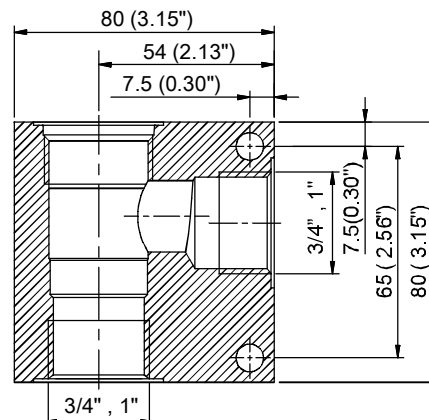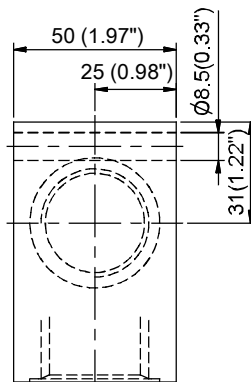

Appendices-B

附錄-B

MAX.PRESSURE

3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

ORDER THE EXPLANATION

訂購說明

CS08 - 2N - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)
D: Nodular Ductile-Iron (Galvanization)
S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)
D: 球墨鑄鐵(鍍鋅)
S: 鋼質(鍍鋅)


CAVITY 孔口

CS08-2N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS08-2N-**-A	1/4	0.21 (0.46 lbs)
	SAE4	
CS08-2N-**-B	3/8	0.30 (0.66 lbs)
	SAE6	
CS08-2N-**-C	1/2	0.30 (0.66 lbs)
	SAE8	

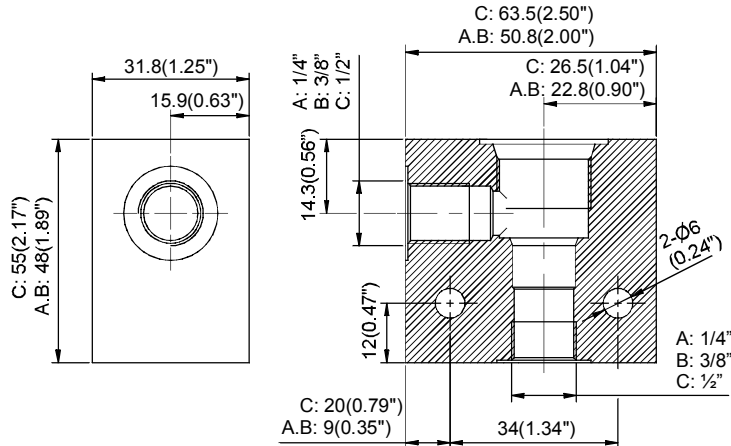


CAVITY 孔口

CS10-2N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS10-2N-**-A	1/2	0.43 (0.95 lbs)
	SAE8	
CS10-2N-**-B	3/8	0.60 (1.32 lbs)
	SAE6	
CS10-2N-**-C	3/4	0.60 (1.32 lbs)
	SAE12	

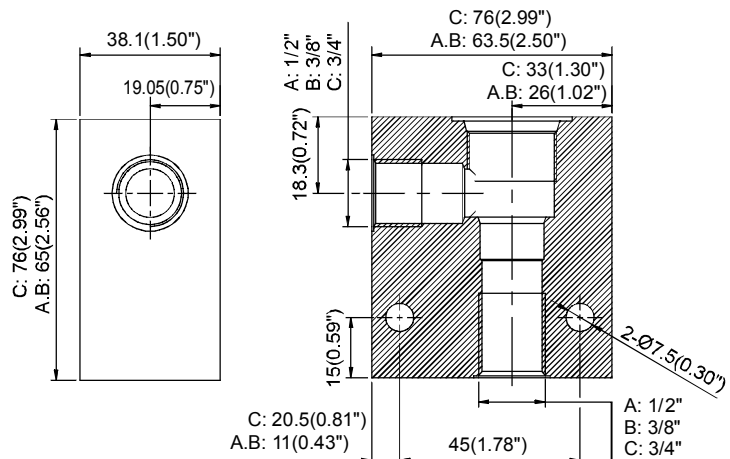


CAVITY 孔口

CS12-2N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS12-2N-**-A	1/2	0.66 (1.46 lbs)
	SAE8	
CS12-2N-**-B	3/4	0.66 (1.46 lbs)
	SAE12	

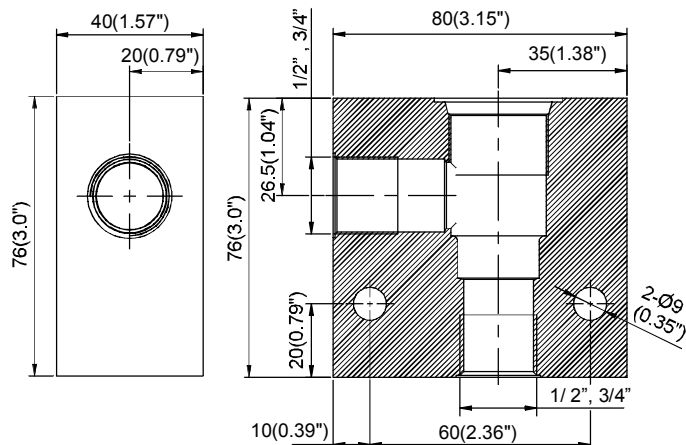

MAX.PRESSURE

3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註: 標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊, 請聯繫工廠。

STANDARD MANIFOLDS

CSXX-2N

標準油路板

ORDER THE EXPLANATION

訂購說明

CS16 - 2N - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D : Nodular Ductile-Iron (Galvanization)

S : Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)

D : 球墨鑄鐵(鍍鋅)

S : 鋼質(鍍鋅)


CAVITY 孔口

CS16-2N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS16-2N-**-A	3/ 4	0.86 (1.90 lbs)
	SAE12	
CS16-2N-**-B	1	
	SAE16	

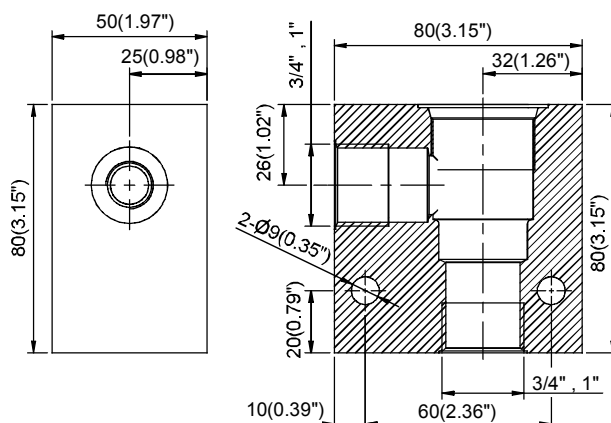


CAVITY 孔口

CS20-2N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS20-2N-**-A	1-1/ 4	1.58 (3.48 lbs)
	SAE20	
CS20-2N-**-B	1	
	SAE16	

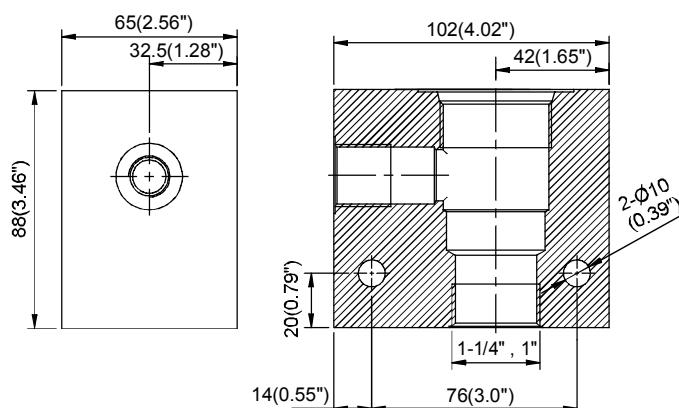


CAVITY 孔口

CS42-2N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS42-2N-**-A	1-1/ 4	2.12 (4.67 lbs)
	SAE20	

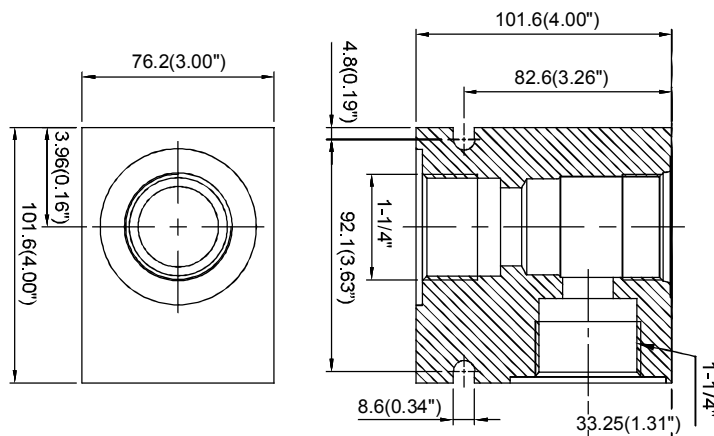

FEATURES

MAX.PRESSURE 3600 psi
(250 bar)

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

ORDER THE EXPLANATION

訂購說明

CS12 - 2NB - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D: Nodular Ductile-Iron (Galvanization)

S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)

D: 球墨鑄鐵(鍍鋅)

S: 鋼質(鍍鋅)


CAVITY 孔口

CS12-2NB

Dimensions on VF1223

尺寸在VF1223

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS12-2NB-**-A	1/ 2	0.78 (1.72 lbs)
	SAE8	
CS12-2NB-**-B	3/4	
	SAE12	

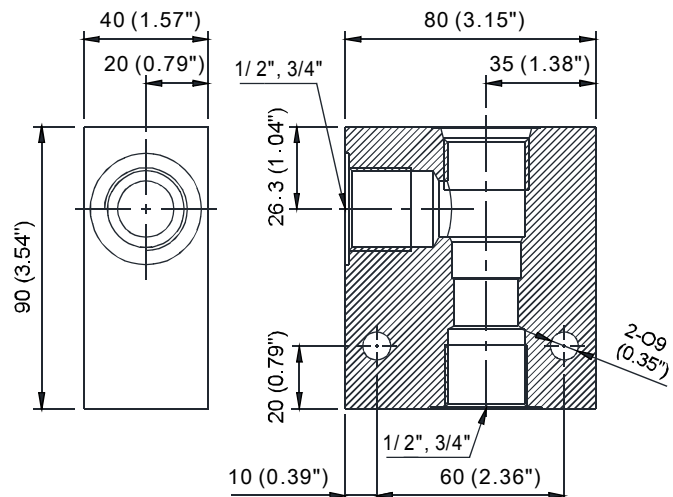MAX.PRESSURE 3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註: 標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊, 請聯繫工廠。

STANDARD MANIFOLDS

CSXX-2NY

標準油路板

Appendices-B

附錄-B

ORDER THE EXPLANATION

訂購說明

CS08 - 2NY - ** - A *

※1

※2

※3

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D: Nodular Ductile-Iron (Galvanization)




無 (標準): 鋁合金(陽極處理)

D: 球墨鑄鐵(鍍鋅)

CAVITY 孔口 CS08-2NY

Dimensions on Appendices-A 尺寸在附錄A




ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS08-2NY-**-A	1/4	0.25 (0.55 lbs)
	SAE4	
CS08-2NY-**-B	3/8	
	SAE6	



CAVITY 孔口 CS10-2NY

Dimensions on Appendices-A 尺寸在附錄A




ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS10-2NY-**-A	1/2	0.48 (1.06 lbs)
	SAE8	
CS10-2NY-**-B	3/8	
	SAE6	



CAVITY 孔口 CS12-2NY

Dimensions on Appendices-A 尺寸在附錄A




ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS12-2NY-**-A	1/2	0.85 (1.87 lbs)
	SAE8	
CS12-2NY-**-B	3/4	
	SAE12	

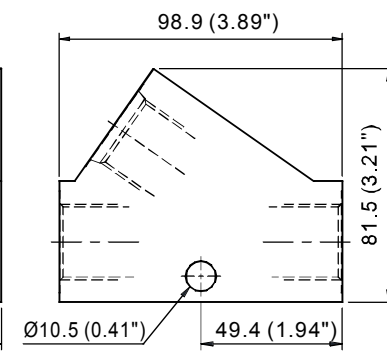

CAVITY 孔口 CS16-2NY

Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS16-2NY-**-A	3/4	1.15 (2.54 lbs)
	SAE12	
CS16-2NY-**-B	1	
	SAE16	

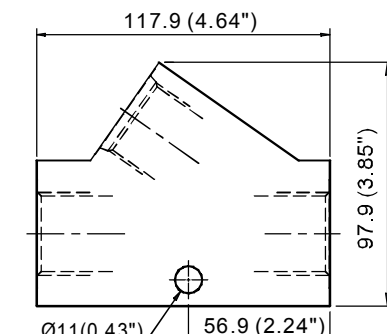

FEATURES

MAX.PRESSURE 3600 psi
(250 bar)

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵閥塊,請聯繫工廠。

ORDER THE EXPLANATION

訂購說明

CS08 - 3N - ** - A *

※1 ※2 ※3

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)
D: Nodular Ductile-Iron (Galvanization)
S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)
D: 球墨鑄鐵(鍍鋅)
S: 鋼質(鍍鋅)

CAVITY 孔口

CS08-3N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CS08-3N-**-A

3/8



SAE6

0.37
(0.82 lbs)

CS08-3N-**-B

1/4

SAE4

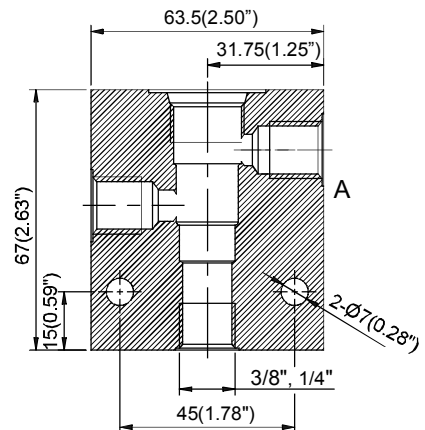

CAVITY 孔口

CS10-3N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CS10-3N-**-A

3/8

SAE6



0.46
(1.01 lbs)

CS10-3N-**-B

1/2

SAE8

0.55
(1.21 lbs)

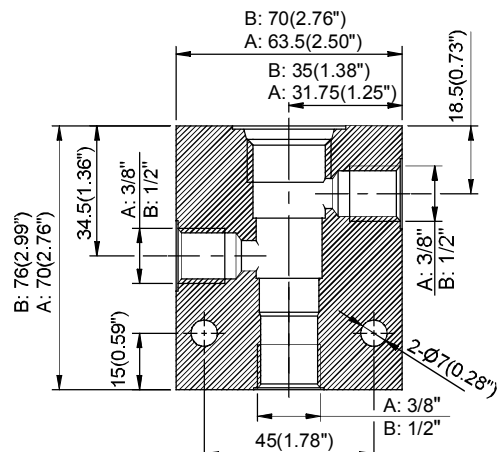

CAVITY 孔口

CS12-3N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CS12-3N-**-A

1/2



SAE8

0.92
(2.03 lbs)

CS12-3N-**-B

3/4

SAE12

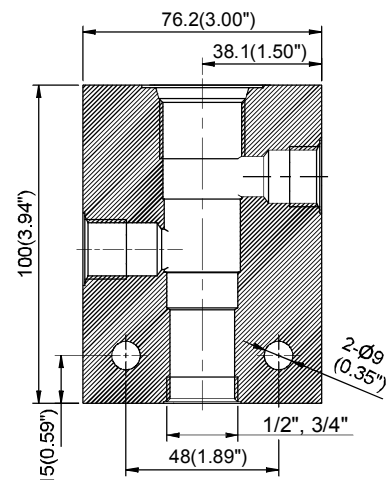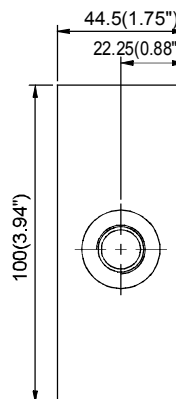

MAX.PRESSURE

3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

STANDARD MANIFOLDS

CSXX-3N

標準油路板



ORDER THE EXPLANATION

訂購說明

CS16 - 3N - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D: Nodular Ductile-Iron (Galvanization)

S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)

D: 球墨鑄鐵(鍍鋅)

S: 鋼質(鍍鋅)

CAVITY 孔口

CS16-3N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CS16-3N-**-A

3/4



SAE12

1.47
(3.24 lbs)

CS16-3N-**-B

1

SAE16

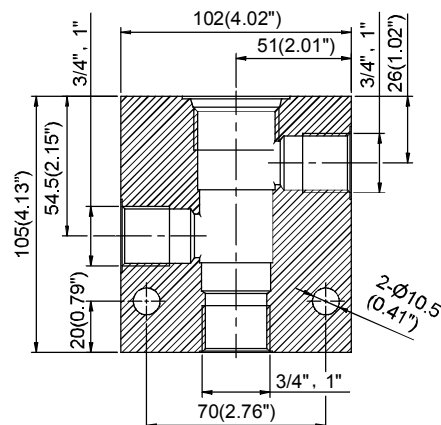

CAVITY 孔口

CS20-3N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight



重量 Kg(lbs)

CS20-3N-**-A

1-1/4

SAE20

2.33
(5.14 lbs)

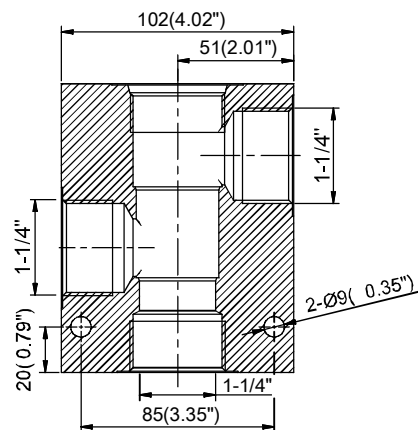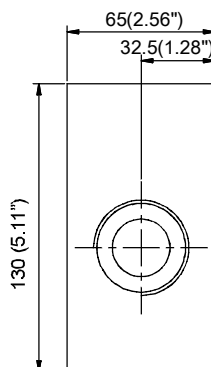

Appendices-B

附錄-B

MAX.PRESSURE

3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

CSXX-3S

STANDARD MANIFOLDS

CSXX-3S

標準油路板



ORDER THE EXPLANATION

訂購說明

CS16 - 3S - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D : Nodular Ductile-Iron (Galvanization)

S : Steel (Galvanization)

無 (標準) : 鋁合金(陽極處理)

D : 球墨鑄鐵(鍍鋅)

S : 鋼質(鍍鋅)

CAVITY 孔口

CS16-3S

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)


CS16-3S-**-A

1

SAE16

1.11

(2.45 lbs)

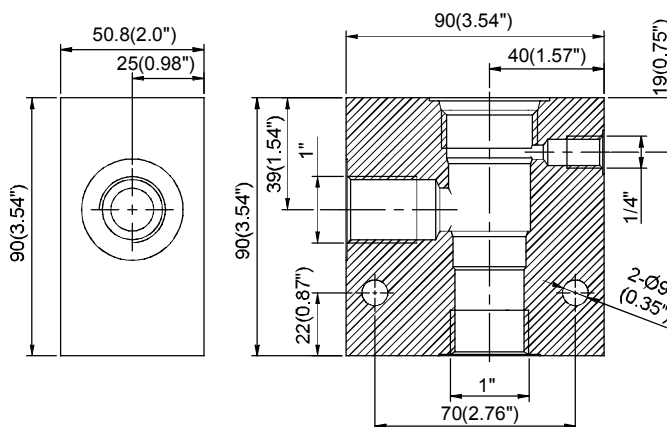

CAVITY 孔口

CS20-3S

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)


CS20-3S-**-A

1-1/4

SAE20

1.93

(4.25 lbs)

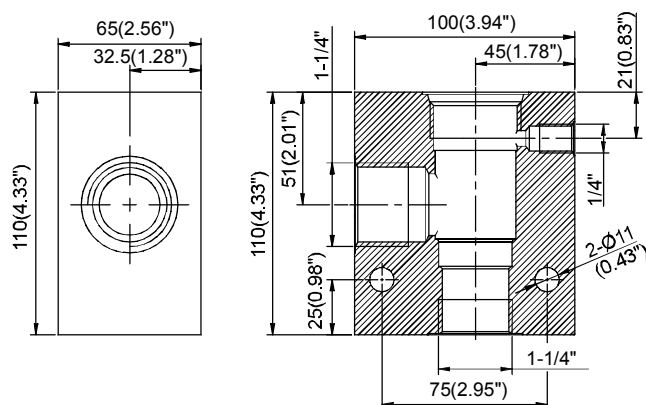

Appendices-B

附錄-B

MAX.PRESSURE

3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

ORDER THE EXPLANATION

訂購說明

CS08 - 4N - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D: Nodular Ductile-Iron (Galvanization)

S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)

D: 球墨鑄鐵(鍍鋅)

S: 鋼質(鍍鋅)

CAVITY 孔口

CS08-4N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CS08-4N-**-A

3/8

SAE6

0.45

(0.99 lbs)

CAVITY 孔口

CS10-4N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CS10-4N-**-A

1/2

SAE8

CS10-4N-**-B

3/8

SAE6

0.55

(1.21 lbs)

CS10-4N-**-D

SAE 10

CAVITY 孔口

CS12-4N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CS12-4N-**-A

3/4

SAE12







CS12-4N-**-B

1

SAE 16

1.78

(3.92 lbs)

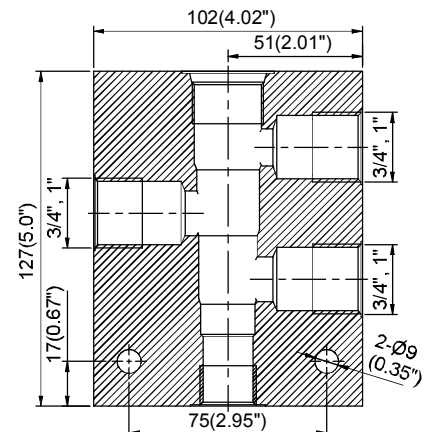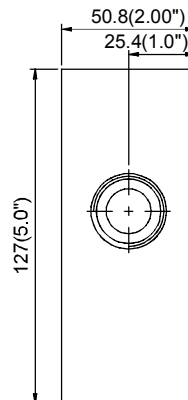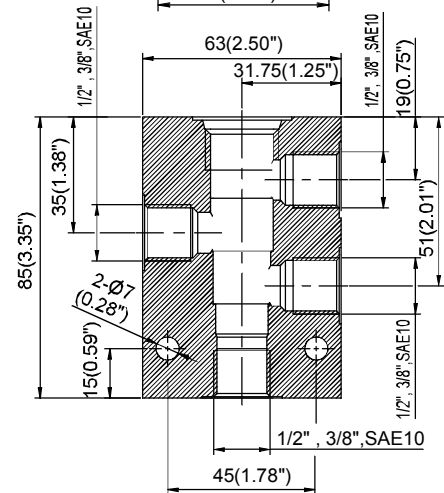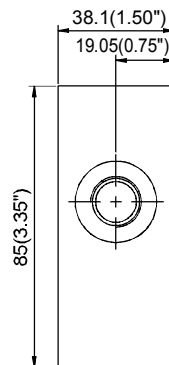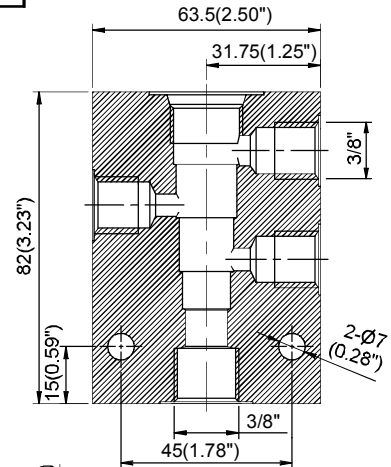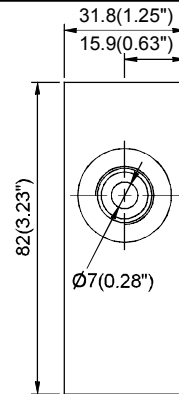

MAX.PRESSURE

3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

STANDARD MANIFOLDS

CSXX-4N

標準油路板

ORDER THE EXPLANATION

訂購說明

CS16 - 4N - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D: Nodular Ductile-Iron (Galvanization)

S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)

D: 球墨鑄鐵(鍍鋅)

S: 鋼質(鍍鋅)

CAVITY 孔口

CS16-4N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CS16-4N-**-A

3/4

SAE12

1.82

(4.01 lbs)

CS16-4N-**-B

1

SAE16

CAVITY 孔口

CS20-4N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)





CS20-4N-**-A

1

SAE16

3.17

(6.99 lbs)

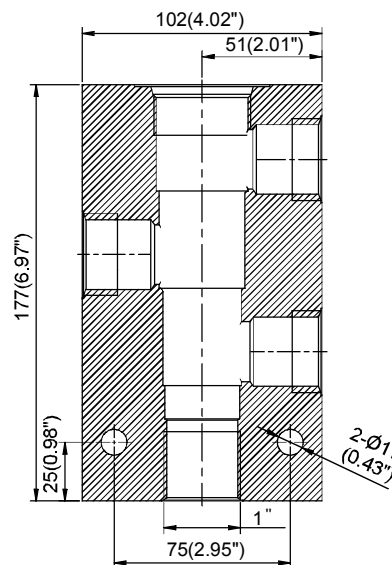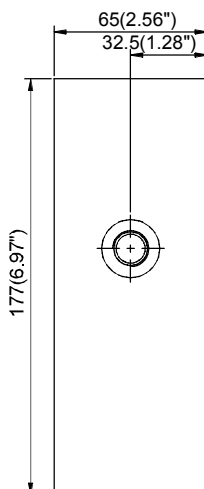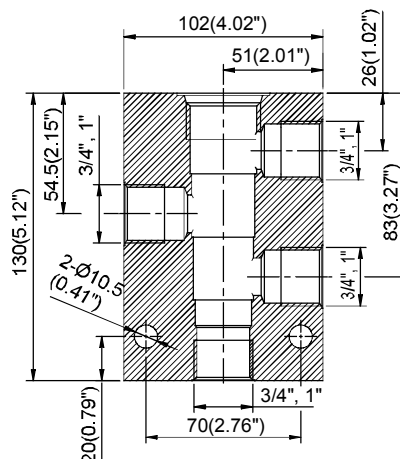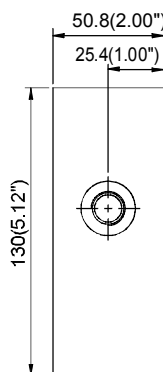

MAX.PRESSURE

3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註: 標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊, 請聯繫工廠。

ORDER THE EXPLANATION

訂購說明

CS10A - 4N - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)
D: Nodular Ductile-Iron (Galvanization)
S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)
D: 球墨鑄鐵(鍍鋅)
S: 鋼質(鍍鋅)


CAVITY 孔口

CS10A-4N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS10A-4N-**-A	3/8 SAE6	0.49 (1.01 lbs)
CS10A-4N-**-B	1/4 SAE4	
CS10A-4N-**-C	1/2 SAE8	

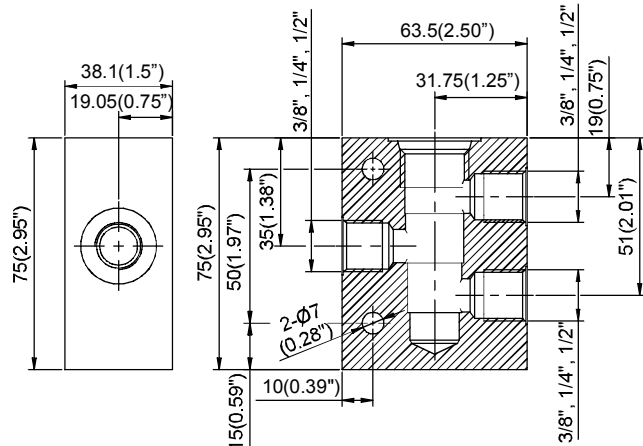


CAVITY 孔口

CS12A-4N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS12A-4N-**-A	3/4 SAE12	1.68 (3.70 lbs)
CS12A-4N-**-B	1 SAE16	
CS12A-4N-**-C	1/2 SAE8	
CS12A-4N-**-D	1/2, 3/4 SAE8, 12	

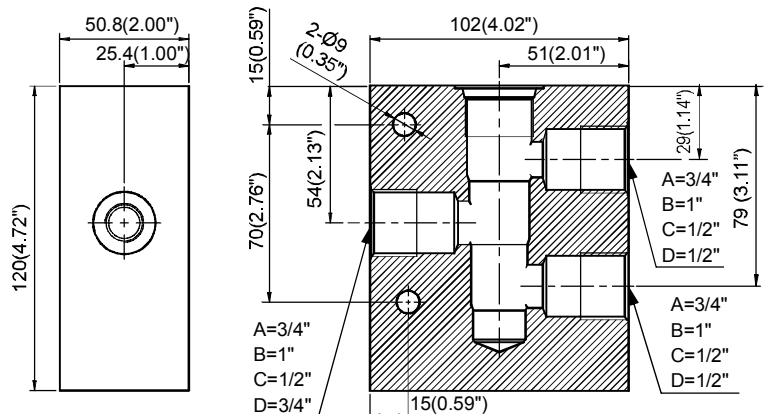


CAVITY 孔口

CS16A-4N

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS16A-4N-**-A	3/4 SAE12	1.61 (3.55 lbs)
CS16A-4N-**-B	1 SAE16	

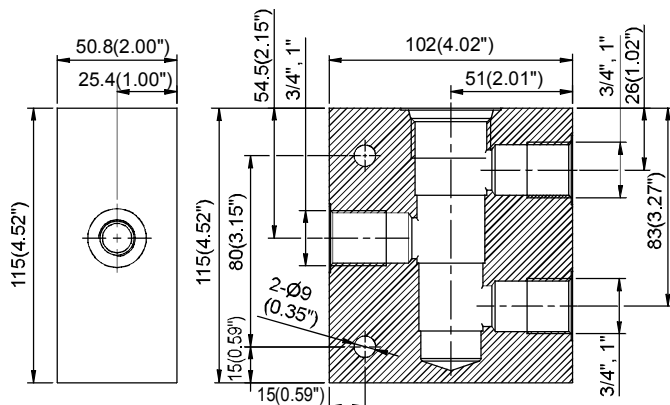

MAX.PRESSURE

3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

STANDARD MANIFOLDS

CST-XXA

標準油路板



ORDER THE EXPLANATION

訂購說明

CST - 2A - ** - A *

※1

※2

※3

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)
D: Nodular Ductile-Iron (Galvanization)
S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)
D: 球墨鑄鐵(鍍鋅)
S: 鋼質(鍍鋅)


CAVITY 孔口

CST-2A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-2A-**-A	3/8 SAE6	0.65 (1.43 lbs)
CST-2A-**-B	1/2 SAE8	
CST-2A-**-C	3/4 SAE12	

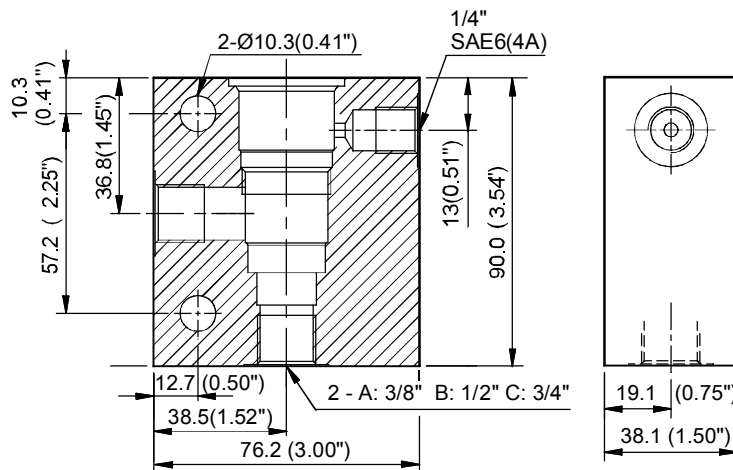


CAVITY 孔口

CST-3A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-3A-**-A	3/8 SAE6	0.48 (1.06 lbs)
CST-3A-**-B	1/2 SAE8	
CST-3A-**-C	3/4 SAE12	
CST-3A-**-D	SAE10	

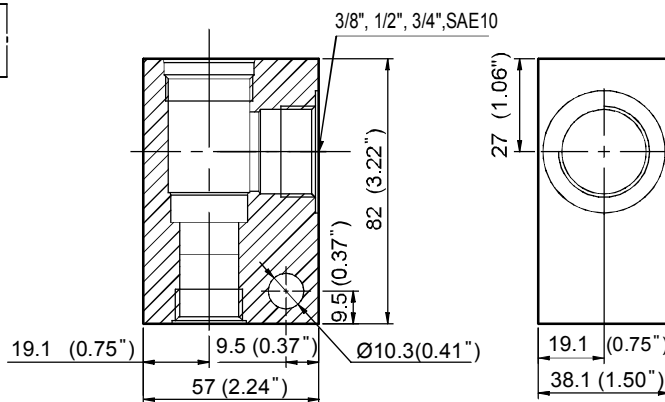


CAVITY 孔口

CST-5A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-5A-**-A	3/8 SAE6	0.38 (0.84lbs)
CST-5A-**-B	1/2 SAE8	

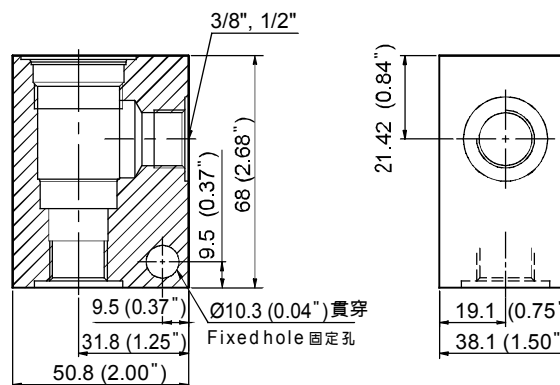

MAX.PRESSURE

3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

ORDER THE EXPLANATION

訂購說明

CST - 8A - ** - A *

※1 ※2 ※3

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D: Nodular Ductile-Iron (Galvanization)

S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)

D: 球墨鑄鐵(鍍鋅)

S: 鋼質(鍍鋅)


CAVITY 孔口

CST-8A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST- 8A - ** - A	1/4 SAE4	0.24 (0.44 lbs)
CST- 8A - ** - B	3/8 SAE6	

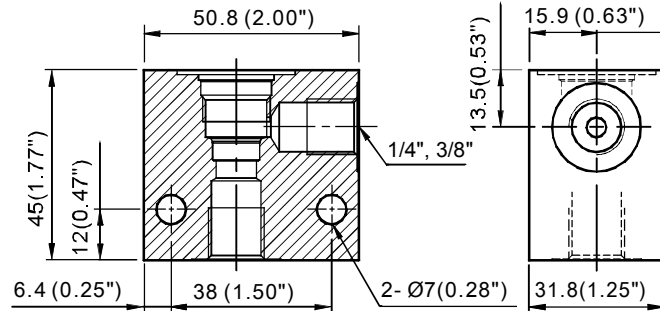


CAVITY 孔口

CST-10A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-10A- ** - A	3/8 SAE6	0.27 (0.60 lbs)
CST-10A- ** - B	1/2 SAE8	
CST-10A- ** - C	3/4 SAE12	0.45 (0.99 lbs)

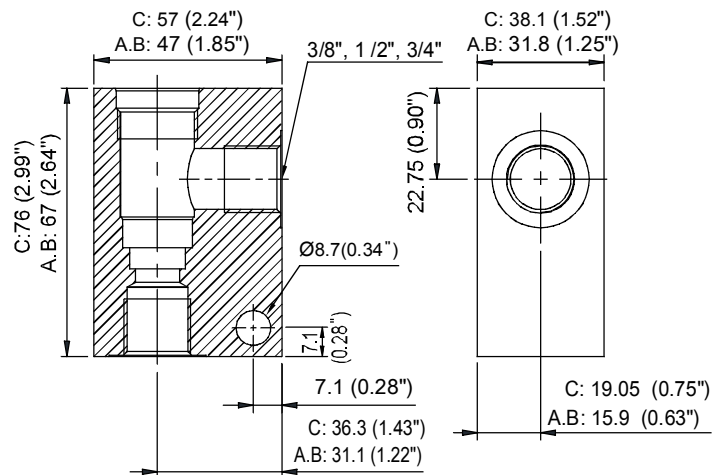


CAVITY 孔口

CST-11A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-11A- ** - A	1/4 SAE4	0.44 (0.97 lbs)
CST-11A- ** - B	3/8 SAE6	
CST-11A- ** - C	1/2 SAE8	

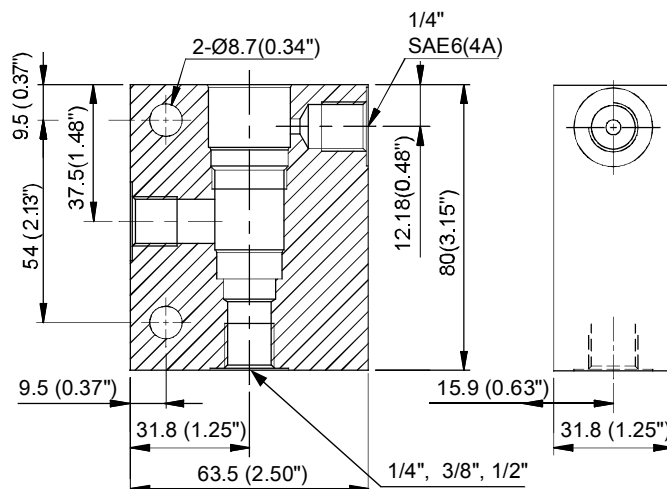

MAX.PRESSURE

3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

標準油路板

訂購說明

※1 ※2 ※3

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

接 ☐

Material 閥體材質

無 (標準): 鋁合金(陽極處理)



D : 球墨鑄鐵(鍍鋅)

S : 鋼質(鍍鋅)

3. □

CST-13A



尺寸在附錄A

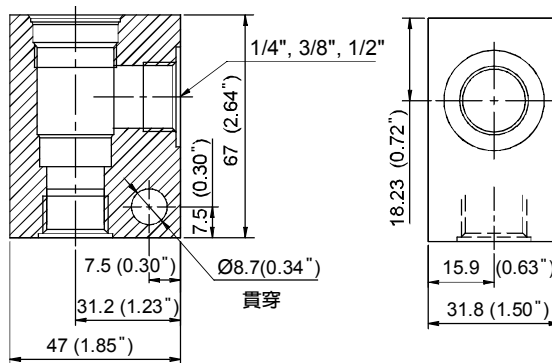重量 Kg(lbs)

Y 孔 □

CST-16A


尺寸在附錄A

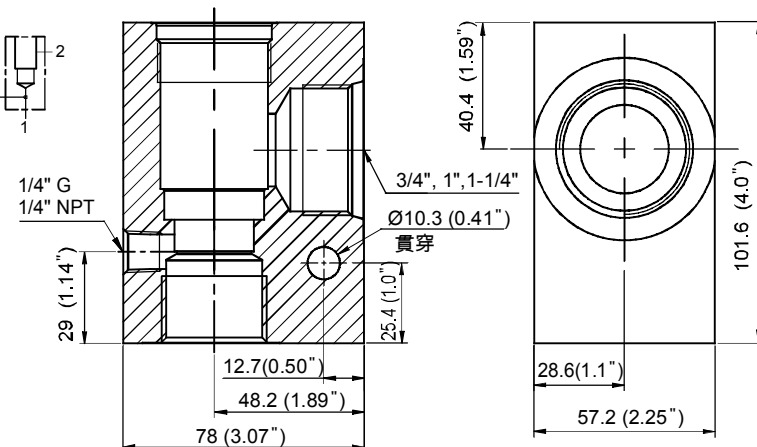重量 Kg(lbs)

Y 孔 □

CST-17A

尺寸在附錄A

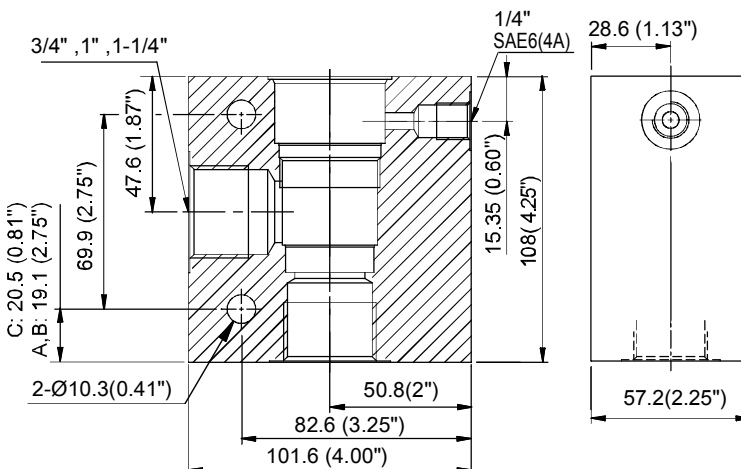重量 Kg(lbs)

FEATURES

MAX.PRESSURE

**3600 psi
(250 bar)**

註：標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊，請聯繫工廠。

ORDER THE EXPLANATION

訂購說明

CST - 18A - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

NONE (Standard): Flange type 無 (標準): 法蘭型

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D: Nodular Ductile-Iron (Galvanization)

S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)

D: 球墨鑄鐵(鍍鋅)

S: 鋼質(鍍鋅)

CAVITY 孔口

CST-18A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-18A-A (*)	1-1/2	2.83 (6.24 lbs)
CST-18A-**-B	1-1/4 SAE20	1.97 (4.34 lbs)
CST-18A-**-C	1 SAE16	
CST-18A-**-D	1-1/2 SAE24	

(*) Flange type only. 僅限法蘭型。

Note: For further information, such like: Dimensions of Threaded type and Flange type..... Please contact us.

註:對於詳細的資訊,像是:螺紋型及法蘭型的法蘭尺寸等.....請與我們聯絡。

CAVITY 孔口

CST-19A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-19A-A (*)	1-1/2	2.80 (6.17 lbs)
CST-19A-**-B	1-1/4 SAE20	2.65 (5.84 lbs)
CST-19A-**-C	1-1/2 SAE24	

(*) Flange type only. 僅限法蘭型。

Note: For further information, such like: Dimensions of Threaded type and Flange type..... Please contact us.

註:對於詳細的資訊,像是:螺紋型及法蘭型的法蘭尺寸等.....請與我們聯絡。




CAVITY 孔口

CST-24A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-24A-**-A	1 SAE16	3.92 (8.64 lbs)
CST-24A-**-B	1-1/4 SAE20	

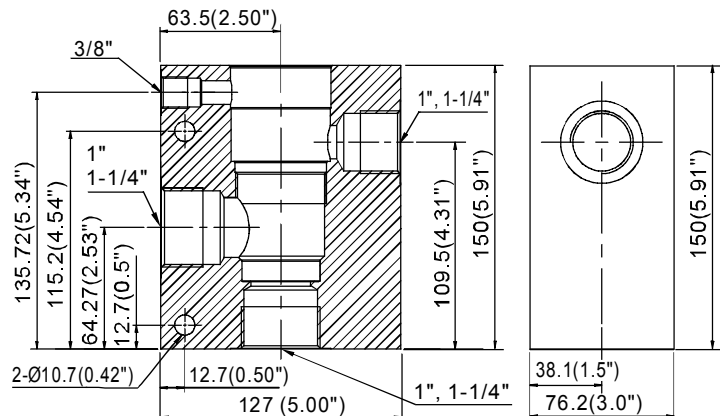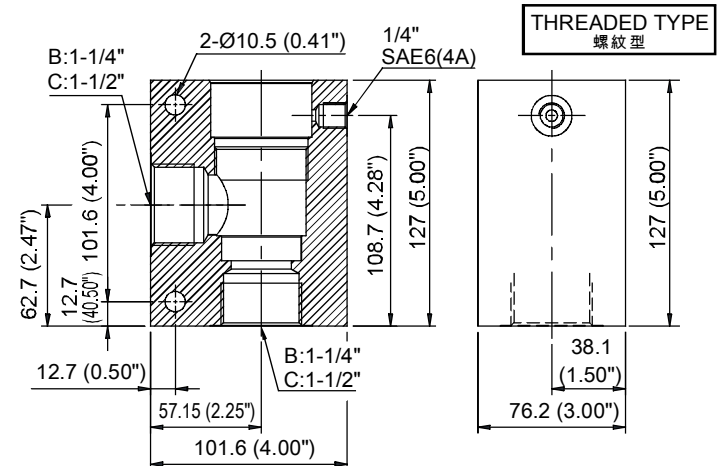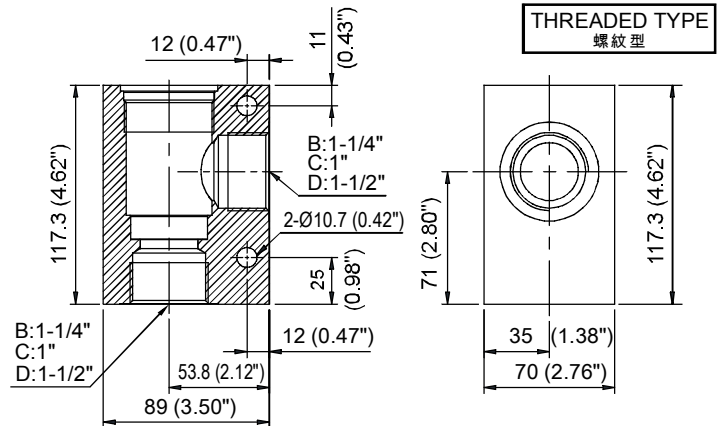

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

MAX.PRESSURE 3600 psi
(250 bar)

STANDARD MANIFOLDS

CST-XXA

標準油路板

ORDER THE EXPLANATION

訂購說明

CST - 31A - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D: Nodular Ductile-Iron (Galvanization)

S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)

D: 球墨鑄鐵(鍍鋅)

S: 鋼質(鍍鋅)


CAVITY 孔口

CST-31A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-31A-**-A	1/4 SAE4	0.73 (1.61 lbs)
CST-31A-**-B	3/8 SAE6	
CST-31A-**-C	1/2 SAE8	
CST-31A-**-D	SAE10	

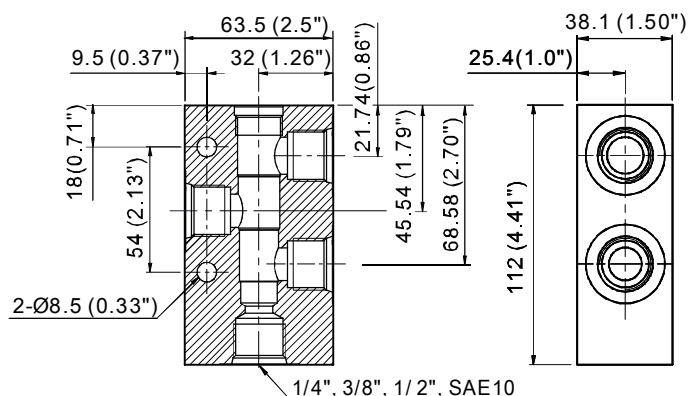


CAVITY 孔口

CST-32A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-32A-**-A	1/2 SAE8	1.33 (2.93 lbs)
CST-32A-**-B	3/4 SAE12	
CST-32A-**-C	3/8 SAE6	
CST-32A-**-D	SAE10	

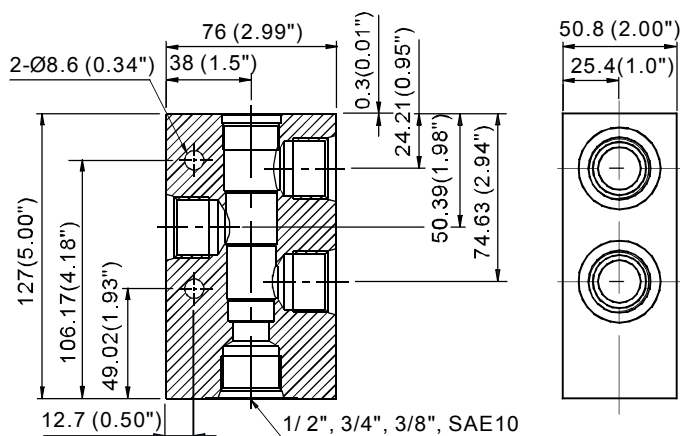


CAVITY 孔口

CST-33A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-33A-**-A	3/4 SAE12	2.46 (5.42 lbs)
CST-33A-**-B	1 SAE16	
CST-33A-**-C	1-1/4 SAE20	

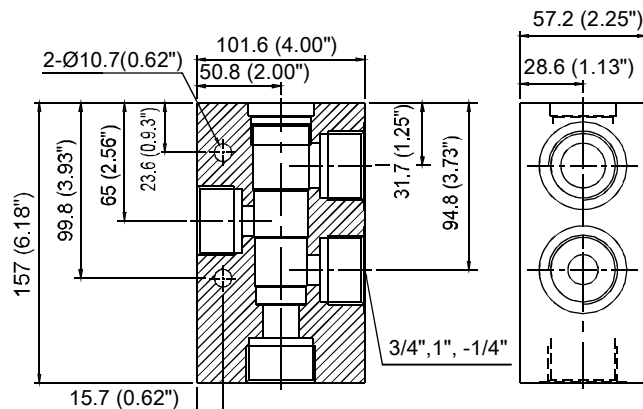

FEATURES

MAX.PRESSURE 3600 psi
(250 bar)

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

ORDER THE EXPLANATION

訂購說明

CST - 34A - ** - A *

※1 ※2 ※3

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)
D: Nodular Ductile-Iron (Galvanization)
S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)
D: 球墨鑄鐵(鍍鋅)
S: 鋼質(鍍鋅)

CAVITY 孔口

CST-34A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CST-34A-**-A

1

5.06


CST-34A-**-B

1-1/4

(11.16 lbs)

SAE16

SAE20

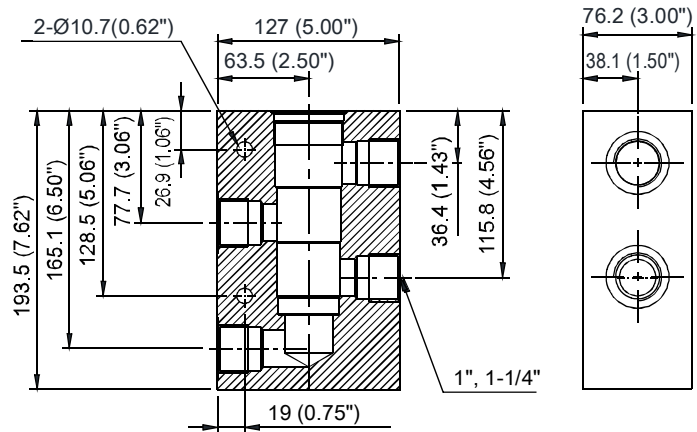

CAVITY 孔口

CST-162A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CST-162A-**-A

1/4

0.13

CST-162A-**-B

3/8

(0.29 lbs)

SAE4


SAE6

CST-162A-**-C

1/2

0.25

SAE8

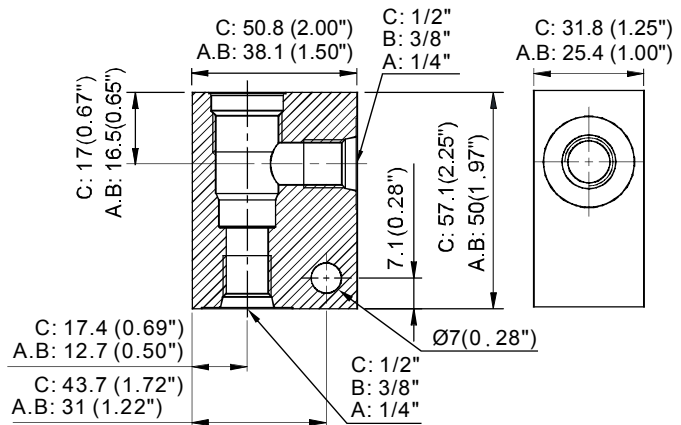

CAVITY 孔口

CST-163A

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CST-163A-**-A

1/4

0.23


CST-163A-**-B

3/8

(0.51 lbs)

SAE4

SAE6

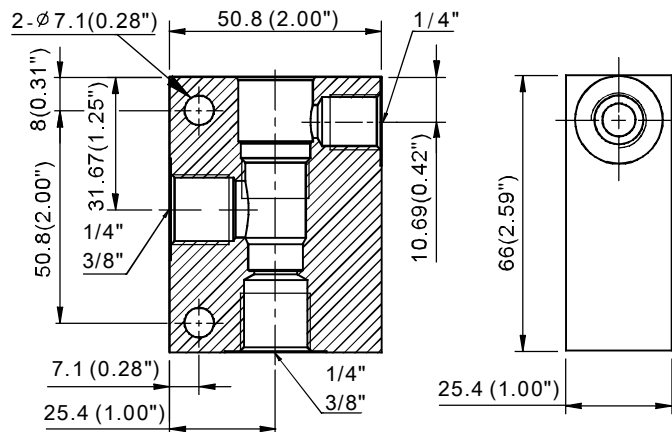

FEATURES

MAX.PRESSURE

3600 psi
(250 bar)

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

STANDARD MANIFOLDS

CST-XXAS

標準油路板

ORDER THE EXPLANATION

訂購說明

CST - 31AS - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D: Nodular Ductile-Iron (Galvanization)

S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)

D: 球墨鑄鐵(鍍鋅)

S: 鋼質(鍍鋅)


CAVITY 孔口

CST-31AS

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-31AS-**-A	1/4	0.73 (1.61 lbs)
	SAE4	
CST-31AS-**-B	3/8	
	SAE6	
CST-31AS-**-C	1/2	
CST-31AS-**-D	SAE8	
	SAE10	

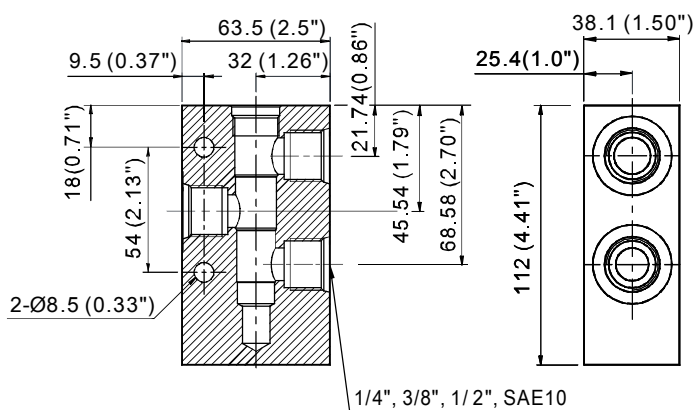


CAVITY 孔口

CST-32AS

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-32AS-**-A	1/2	1.33 (2.93 lbs)
	SAE8	
CST-32AS-**-B	3/4	
	SAE12	
CST-32AS-**-C	3/8	
CST-32AS-**-D	SAE6	
	SAE10	

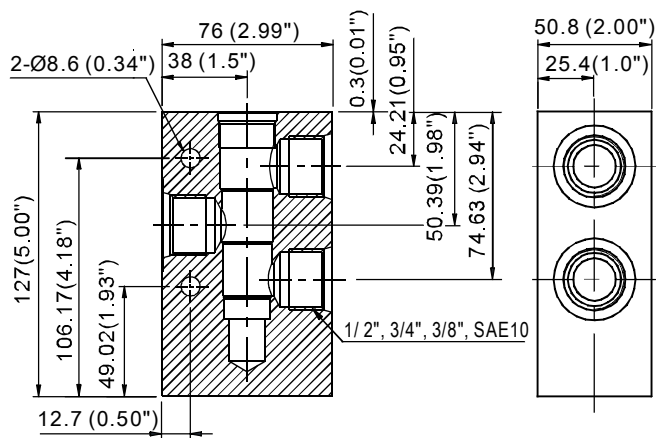


CAVITY 孔口

CST-33AS

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-33AS-**-A	3/4	2.46 (5.42 lbs)
	SAE12	
CST-33AS-**-B	1	
CST-33AS-**-C	SAE16	
	1-1/4	
	SAE20	

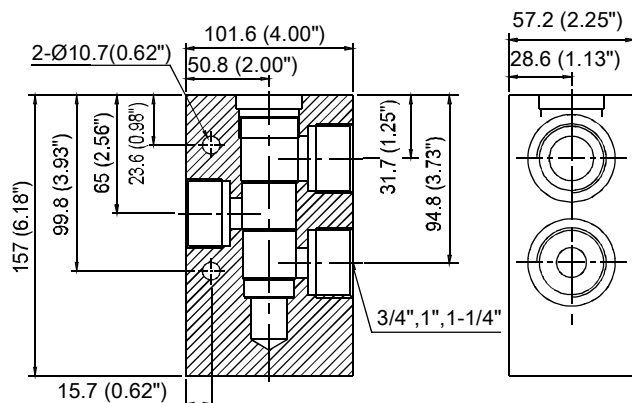

FEATURES

MAX.PRESSURE 3600 psi (250 bar)

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

ORDER THE EXPLANATION

訂購說明

CST - 34AS - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D : Nodular Ductile-Iron (Galvanization)

S : Steel (Galvanization)

無 (標準) : 鋁合金(陽極處理)

D : 球墨鑄鐵(鍍鋅)

S : 鋼質(鍍鋅)

CAVITY 孔口

CST-34AS

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CST-34AS-**-A

1

SAE 16


5.06

(11.16 lbs)

CST-34AS-**-B

1-1/4

SAE20

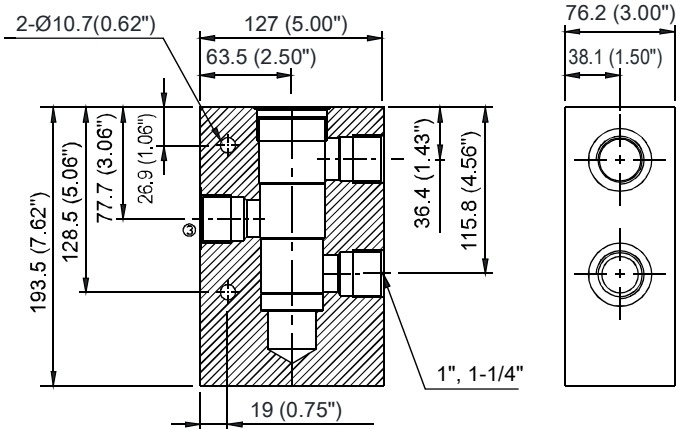

MAX.PRESSURE

3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

STANDARD MANIFOLDS

CST-XXA XX

標準油路板

ORDER THE EXPLANATION

訂購說明

CST- 2A VG - ** - A *

※1

※2

※3

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D : Nodular Ductile-Iron (Galvanization)

S : Steel (Galvanization)

無 (標準) : 鋁合金(陽極處理)

D : 球墨鑄鐵(鍍鋅)

S : 鋼質(鍍鋅)


CAVITY 孔口

CST-2A VG

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-2A VG-**-A	3/8 SAE6	0.97 (2.14 lbs)
CST-2A VG-**-B	1/2 SAE8	
CST-2A VG-**-C	3/4 SAE12	
CST-2A VG-**-D	SAE 10	

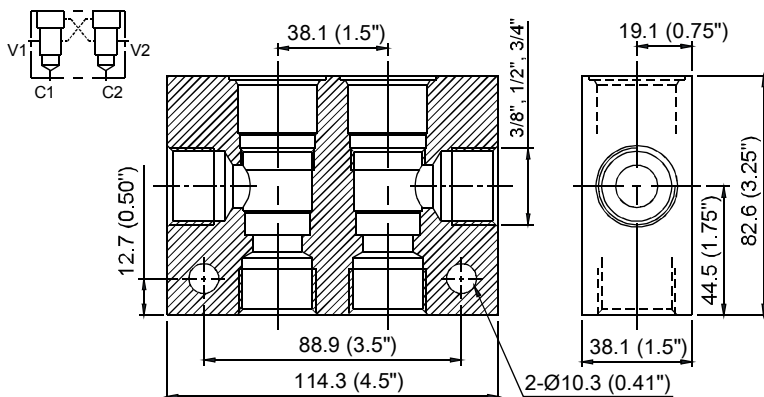


CAVITY 孔口

CST-11A YE

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-11A YE-**-A	1/4 SAE4	0.66 (1.46 lbs)
CST-11A YE-**-B	3/8 SAE6	
CST-11A YE-**-C	1/2 SAE8	
CST-11A YE-**-D	SAE 10	

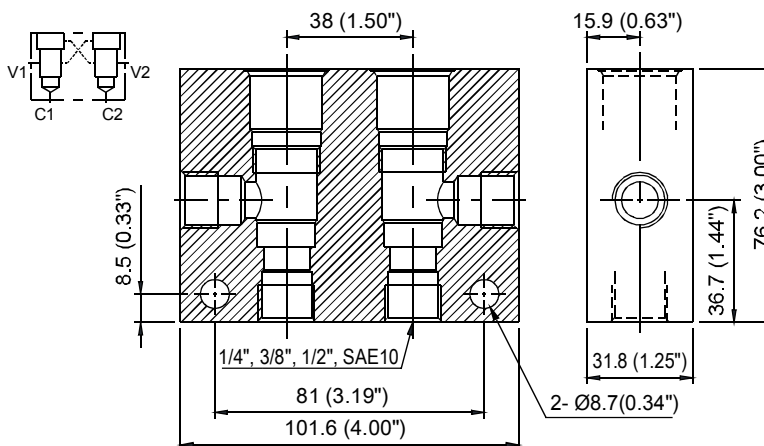


CAVITY 孔口

CST-17A YJ

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-17A YJ-**-A	3/4 SAE12	2.59 (5.71 lbs)
CST-17A YJ-**-B	1 SAE16	
CST-17A YJ-**-C	1-1/4 SAE20	

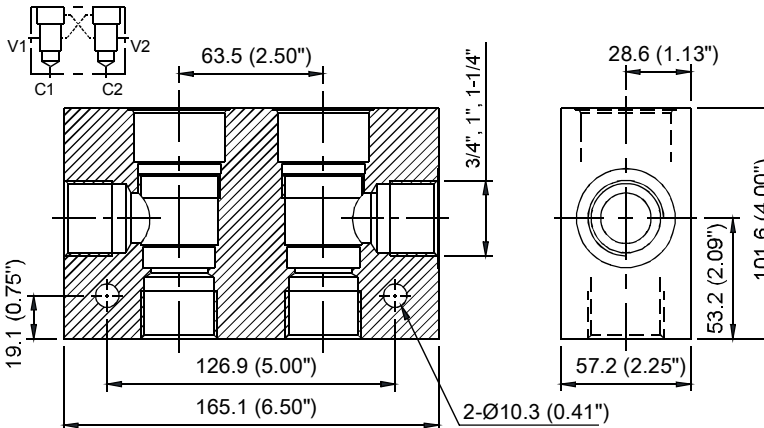

FEATURES

MAX.PRESSURE

3600 psi
(250 bar)

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

ORDER THE EXPLANATION

訂購說明

CST- 19A YM $\frac{**}{※1}$ $\frac{-A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D: Nodular Ductile-Iron (Galvanization)

S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)

D: 球墨鑄鐵(鍍鋅)


S: 鋼質(鍍鋅)

CAVITY 孔口 CST-19A YM

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-19A YM-**-A	1-1/2	5.30 (11.68 lbs)
	SAE24	
CST-19A YM-**-B	1-1/4	
	SAE20	

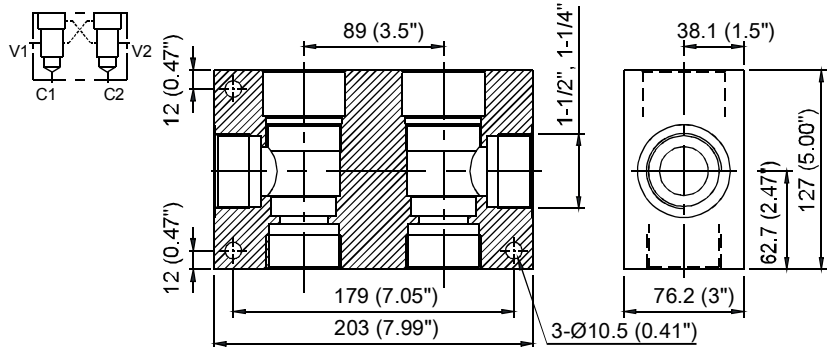


CAVITY 孔口 CST-2A YH

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-2A YH-**-A	3/8	1.05 (2.31 lbs)
	SAE6	
CST-2A YH-**-B	1/2	
	SAE8	
CST-2A YH-**-C	3/4	
	SAE12	

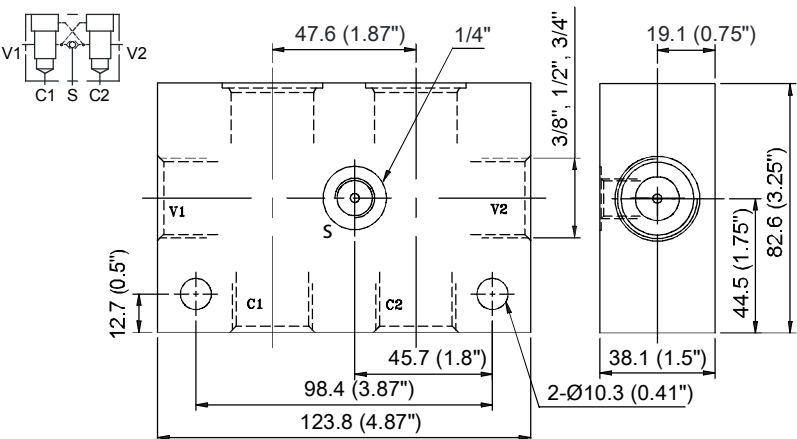


CAVITY 孔口 CST-11A YG

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-11A YG-**-A	1/4	0.66 (1.46 lbs)
	SAE4	
CST-11A YG-**-B	3/8	
	SAE6	
CST-11A YG-**-C	1/2	
	SAE8	
CST-11A YG-**-D	SAE10	

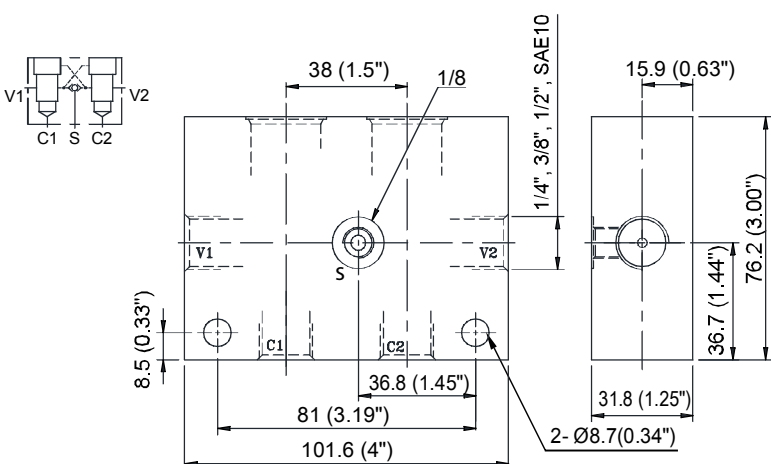

FEATURES

MAX.PRESSURE 3600 psi
(250 bar)

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註: 標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊, 請聯繫工廠。

STANDARD MANIFOLDS

CST-XXA XX

標準油路板

ORDER THE EXPLANATION

訂購說明

CST- 17A YK - ** - A *

※1

※2

※3

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D : Nodular Ductile-Iron (Galvanization)

S : Steel (Galvanization)

無 (標準) : 鋁合金(陽極處理)

D : 球墨鑄鐵(鍍鋅)

S : 鋼質(鍍鋅)

CAVITY 孔口

CST-17A YK

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CST-17A YK-**-A

3/4

SAE12

CST-17A YK-**-B

1

SAE16


CST-17A YK-**-C

1-1/4

SAE20

2.59

(5.71 lbs)

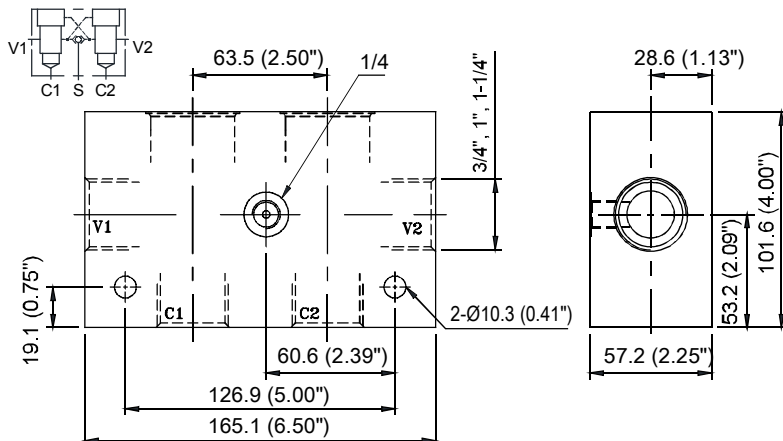

CAVITY 孔口

CST-19A YN

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CST-19A YN-**-A

1-1/4

SAE20


CST-19A YN-**-B

1

SAE16

5.30

(11.68 lbs)

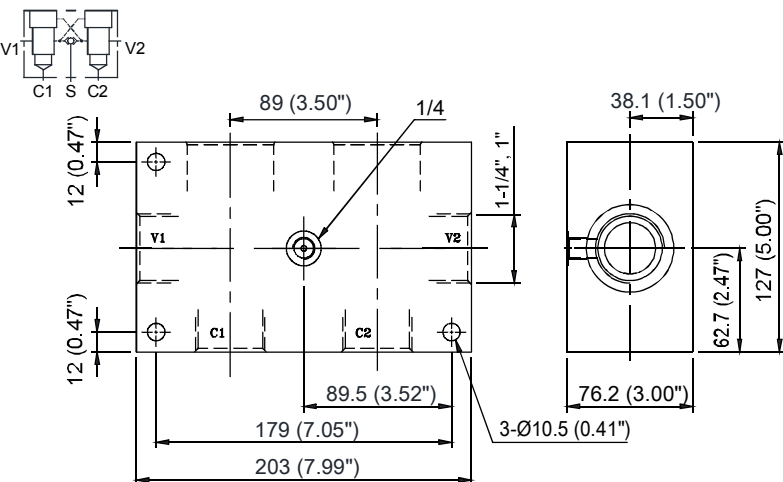

CAVITY 孔口

CST-2A YD

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE

訂購代號

Ports

接口

Weight

重量 Kg(lbs)

CST-2A YD-**-A

3/4


SAE12

0.97

(2.14 lbs)

Note: This item only offers two 3G and 4A ports.

註: 此項目只供應3G和4A接口

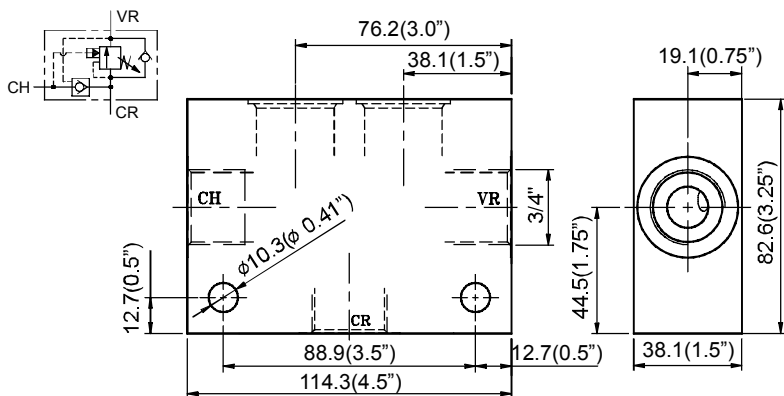

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details

註: 標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊, 請聯繫工廠。

MAX.PRESSURE

3600 psi
(250 bar)

ORDER THE EXPLANATION

訂購說明

CST- 3A CE - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)
D: Nodular Ductile-Iron (Galvanization)
S: Steel (Galvanization)

無 (標準): 鋁合金(陽極處理)
D: 球墨鑄鐵(鍍鋅)
S: 鋼質(鍍鋅)




CAVITY 孔口

CST-3A CE

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-3A CE-**-A	3/4 SAE12	0.59 (1.30 lbs)
CST-3A CE-**-B	1/2 SAE8	
CST-3A CE-**-C	3/8 SAE6	0.83 (1.83 lbs)
CST-3A CE-**-D	1 SAE16	

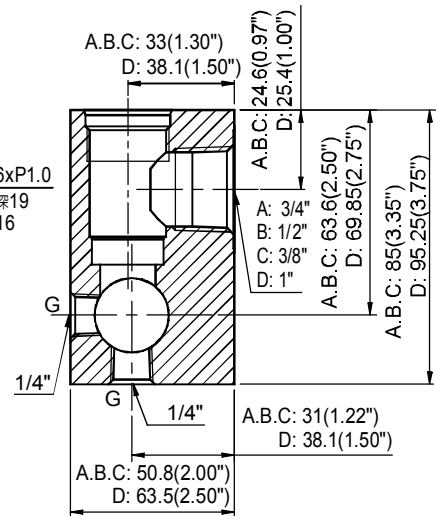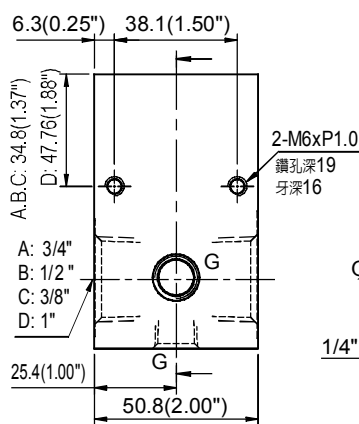



CAVITY 孔口

CST-10A FE

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-10A FE-**-A	3/4 SAE12	0.59 (1.30 lbs)
CST-10A FE-**-B	1/2 SAE8	
CST-10A FE-**-C	3/8 SAE6	0.42 (0.93 lbs)

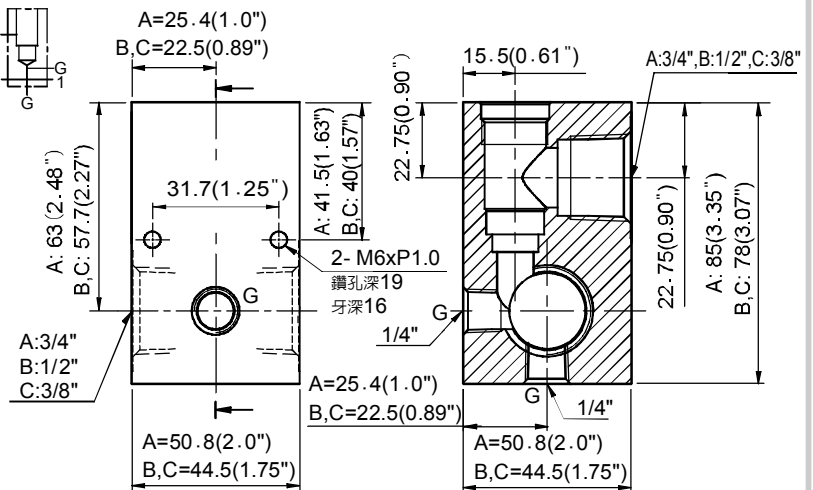

MAX.PRESSURE 3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註: 標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊, 請聯繫工廠。

STANDARD MANIFOLDS

CST-XXA XX

標準油路板

ORDER THE EXPLANATION

訂購說明

CST- 5A XW - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)

D : Nodular Ductile-Iron (Galvanization)

S : Steel (Galvanization)

無 (標準) : 鋁合金(陽極處理)

D : 球墨鑄鐵(鍍鋅)

S : 鋼質(鍍鋅)


CAVITY 孔口

CST- 5A XW

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-5A XW-**-A	3/8 SAE6	0.93 (2.05 lbs)
CST-5A XW-**-B	1/2 SAE8	
CST-5A XW-**-C	SAE10	
CST-5A XW-**-D	3/4 SAE12	

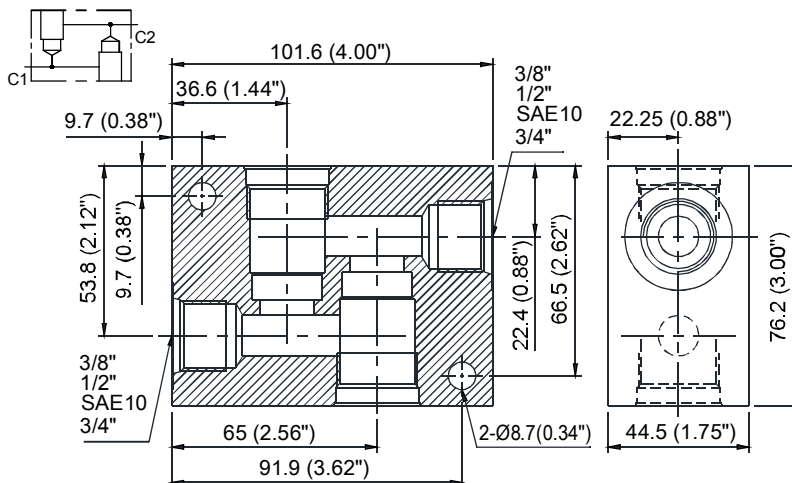


CAVITY 孔口

CST- 10A YF

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-10A YF-**-A	3/8 SAE6	0.64 (1.41 lbs)
CST-10A YF-**-B	1/2 SAE8	

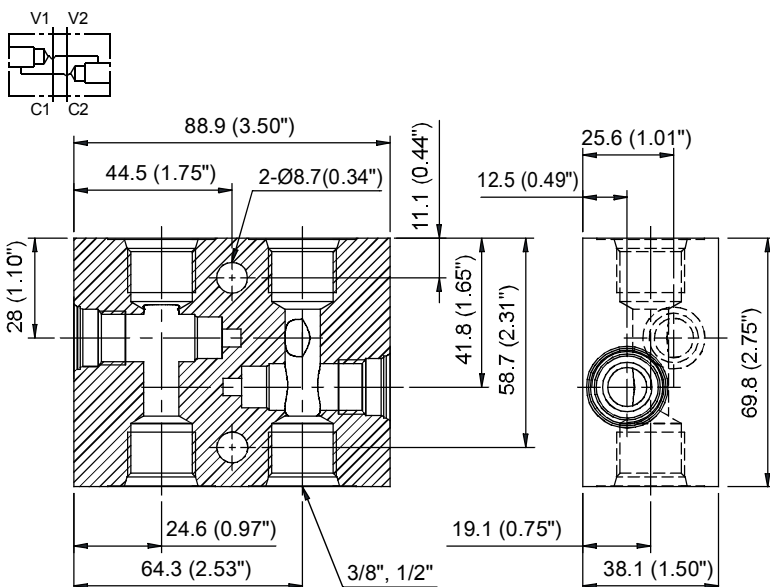

MAX.PRESSURE

**3600 psi
(250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

ORDER THE EXPLANATION 訂購說明

CST- 11A XE - ** - A *

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質



NONE (Standard): Aluminum-alloy (Anodized)
D : Nodular Ductile-Iron (Galvanization)

無 (標準): 鋁合金(陽極處理)
D : 球墨鑄鐵(鍍鋅)

CAVITY 孔口 CST-11A XE

Dimensions on Appendices-A 尺寸在附錄A



ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-11A XE-**-A	3/8 SAE6	0.80 (1.76 lbs)
CST-11A XE-**-B	1/2 SAE8	
CST-11A XE-**-C	1/4 SAE4	

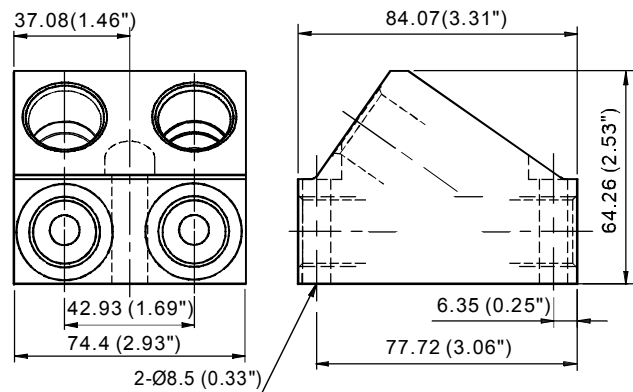

CAVITY 孔口 CST-11A XV

Dimensions on Appendices-A 尺寸在附錄A


ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-11A XV-**-A	3/8 SAE6	0.69 (1.52 lbs)
CST-11A XV-**-B	1/2 SAE8	
CST-11A XV-**-C	1/4 SAE4	

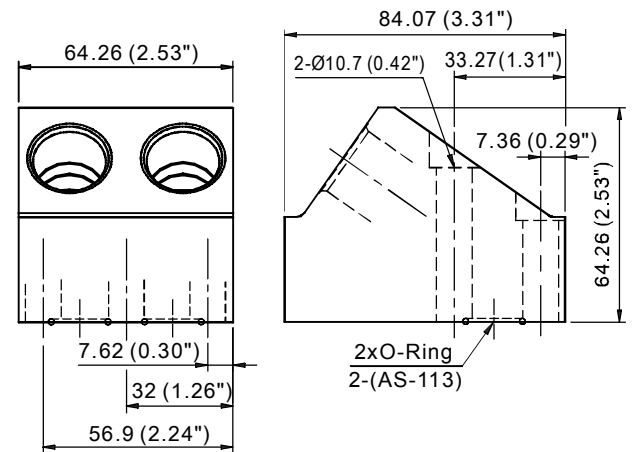

CAVITY 孔口 CST-5A DC

Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-5A DC-**-A	3/8 SAE6	0.41 (0.90 lbs)
CST-5A DC-**-B	1/2 SAE8	
CST-5A DC-**-C	SAE10	

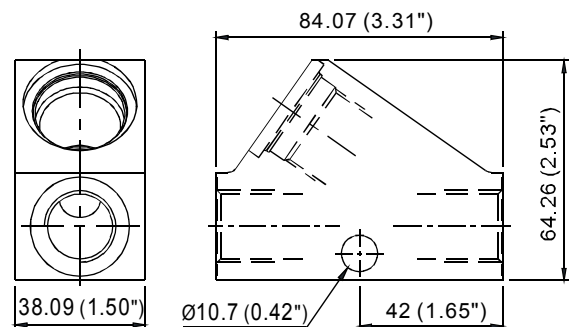

MAX.PRESSURE 3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵閥塊,請聯繫工廠。

STANDARD MANIFOLDS

CST-XXA XX

標準油路板

ORDER THE EXPLANATION

訂購說明

CST- 5A VF - $\frac{**}{※1}$ - $\frac{A}{※2}$ $\frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized)
D : Nodular Ductile-Iron (Galvanization)

無 (標準): 鋁合金(陽極處理)
D : 球墨鑄鐵(鍍鋅)



CAVITY 孔口

CST-5A VF

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-5A VF-**-A	3/4	1.32 (2.91 lbs)
	SAE12	
CST-5A VF-**-B	1	
	SAE16	
CST-5A VF-**-C	1 1/4	
	SAE20	

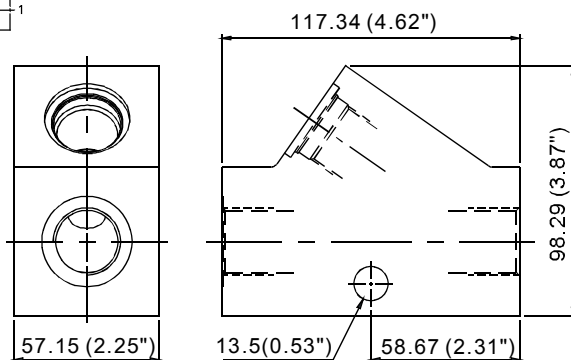



CAVITY 孔口

CST-13A GC

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-13A GC-**-A	3/8	0.19 (1.42 lbs)
	SAE6	
CST-13A GC-**-B	1/2	
	SAE8	
CST-13A GC-**-C	1/4	
	SAE4	

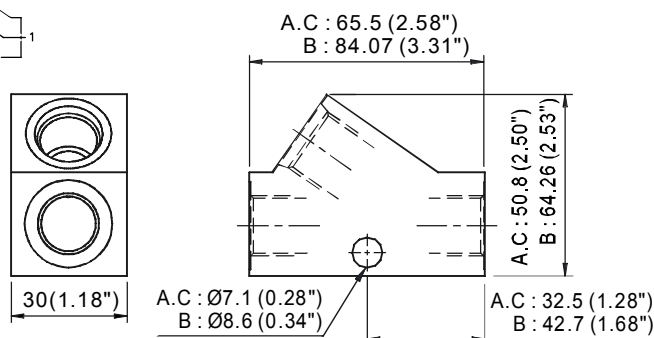



CAVITY 孔口

CST-16A IC

Dimensions on Appendices-A

尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-16A IC-**-A	1/2	1.15 (2.54 lbs)
	SAE8	
CST-16A IC-**-B	3/4	
	SAE12	
CST-16A IC-**-C	1	
	SAE16	

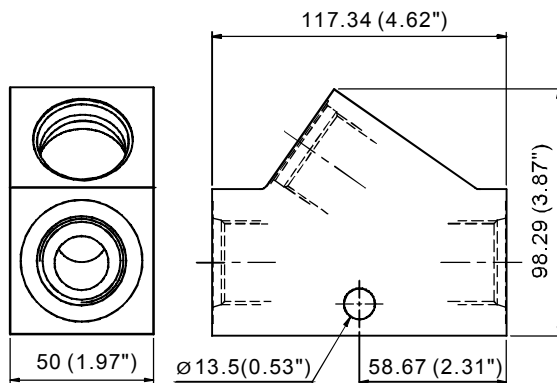

FEATURES

MAX.PRESSURE

3600 psi
(250 bar)

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵閥塊,請聯繫工廠。

ORDER THE EXPLANATION

訂購說明

CST-162A AC $\frac{**}{※1} - \frac{A}{※2} \frac{*}{※3}$

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口




※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized) 無 (標準): 鋁合金(陽極處理)
D: Nodular Ductile-Iron (Galvanization) D: 球墨鑄鐵(鍍鋅)

CAVITY 孔口 CST-162A AC

Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-162A AC-**-A	3/8 SAE6	0.16 (0.35 lbs)
CST-162A AC-**-B	1/4 SAE4	

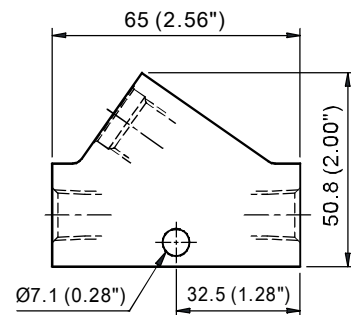

MAX.PRESSURE 3600 psi
(250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar, 另提供球墨鑄鐵閥塊,請聯繫工廠。