◆

ORDER THE EXPLANATION 訂購說明	CSE 04 - 2N - ** - A *
	※1 ※2 ※3

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口


※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)

CAVITY 孔口 CSE 04-2N

Dimensions on Appendices-A 尺寸在附錄A


ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CSE04-2N-**-A	1	1.70 (3.75 lbs)
	SAE16	
CSE04-2N-**-B	1-1 /4	
	SAE20	

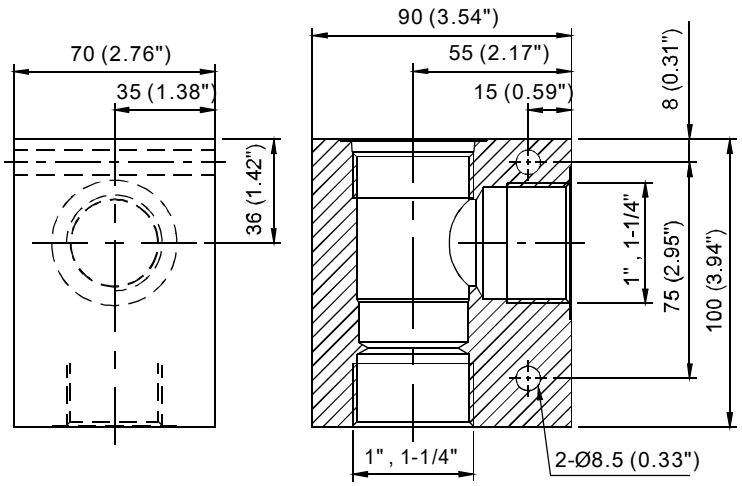

CAVITY 孔口 CSE017-2N

Dimensions on Appendices-A 尺寸在附錄A


ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CSE017-2N-**-A	1/ 2	0.45 (0.99 lbs)
	SAE8	
CSE017-2N-**-B	3/ 4	
	SAE12	

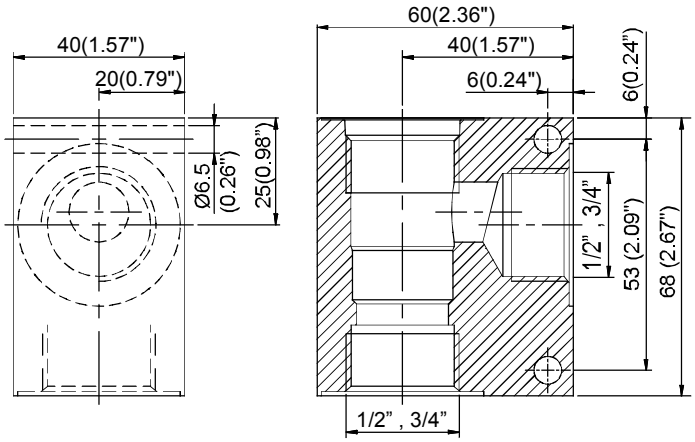

CAVITY 孔口 CSE019-2N

Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CSE019-2N-**-A	1/ 4	0.20 (0.44 lbs)
	SAE4	
CSE019-2N-**-B	3/ 8	
	SAE6	

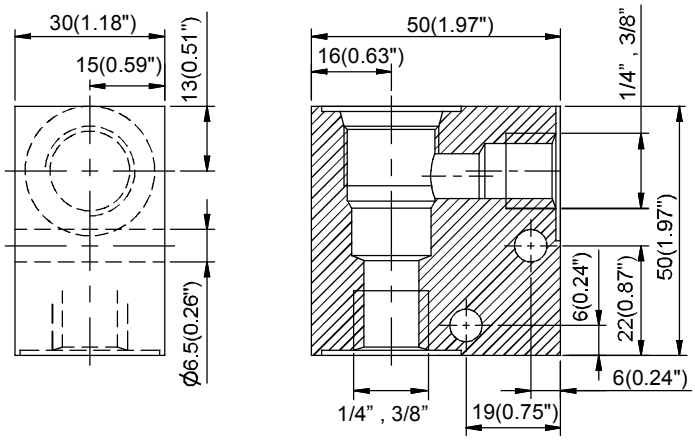

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CSE021 - 2N - ** - A * (※1 ※2 ※3)

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP


※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)

CAVITY 孔口	**CSE021-2N**
Dimensions on Appendices-A 尺寸在附錄A	

ORDERING CODE 訂購代號	**Ports** 接口	**Weight** 重量 Kg(lbs)
CSE021-2N-**-A	3/ 4	0.86 (1.90 lbs)
	SAE12	
CSE021-2N-**-B	1	
	SAE16	

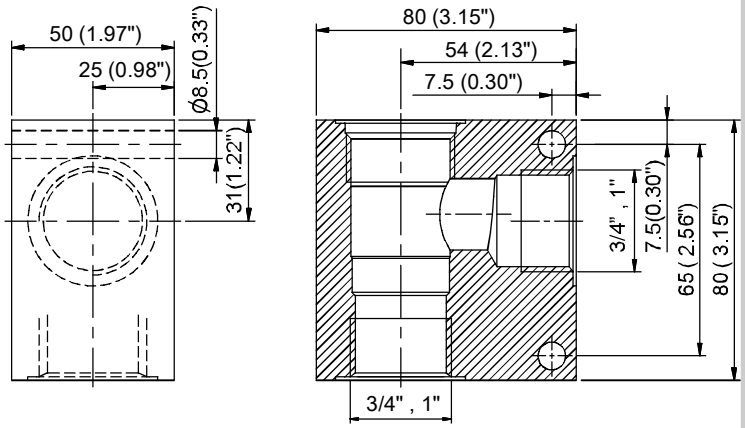

MAX.PRESSURE	**3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CS08 - 2N - ** - A * (※1 ※2 ※3)


※1 Threaded Type 螺紋規格
1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質
NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口 CS08-2N
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS08-2N-**-A	1/ 4	0.21 (0.46 lbs)
	SAE4	
CS08-2N-**-B	3/8	
	SAE6	
CS08-2N-**-C	1/ 2	0.30 (0.66 lbs)
	SAE8	

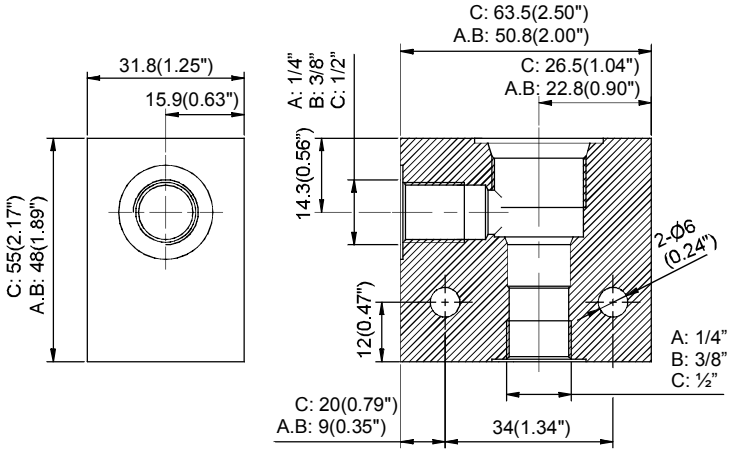


CAVITY 孔口 CS10-2N
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS10-2N-**-A	1/ 2	0.43 (0.95 lbs)
	SAE8	
CS10-2N-**-B	3/8	
	SAE6	
CS10-2N-**-C	3/4	0.60 (1.32 lbs)
	SAE12	

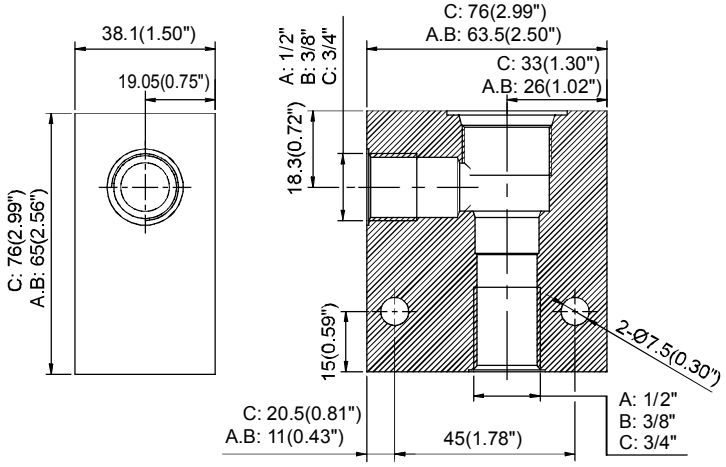

CAVITY 孔口 CS12-2N
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS12-2N-**-A	1/ 2	0.66 (1.46 lbs)
	SAE8	
CS12-2N-**-B	3/4	
	SAE12	

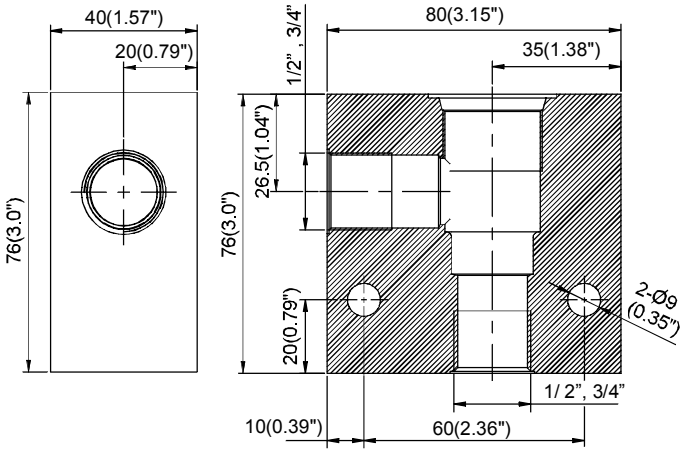

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CS16 - 2N - ** - A * (※1 ※2 ※3)

※1 **Threaded Type** 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP


※2 **Ports** 接口

※3 **Body Material** 閥體材質

NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口	CS16-2N
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS16-2N-**-A	3/ 4 SAE12	0.86 (1.90 lbs)
CS16-2N-**-B	1 SAE16	

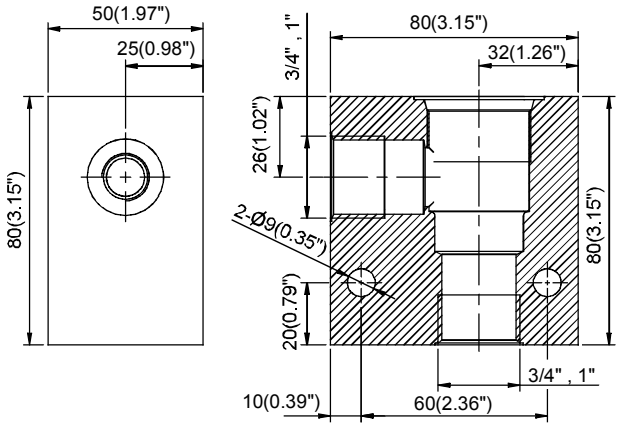


CAVITY 孔口	CS20-2N
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS20-2N-**-A	1-1/ 4 SAE20	1.58 (3.48 lbs)
CS20-2N-**-B	1 SAE16	

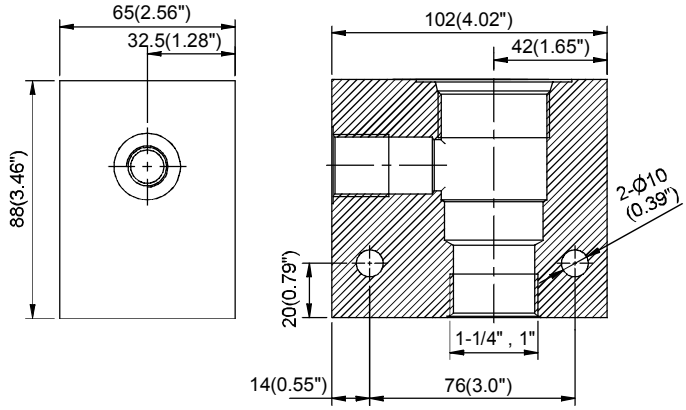

CAVITY 孔口	CS42-2N
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS42-2N-**-A	1-1/ 4 SAE20	2.12 (4.67 lbs)

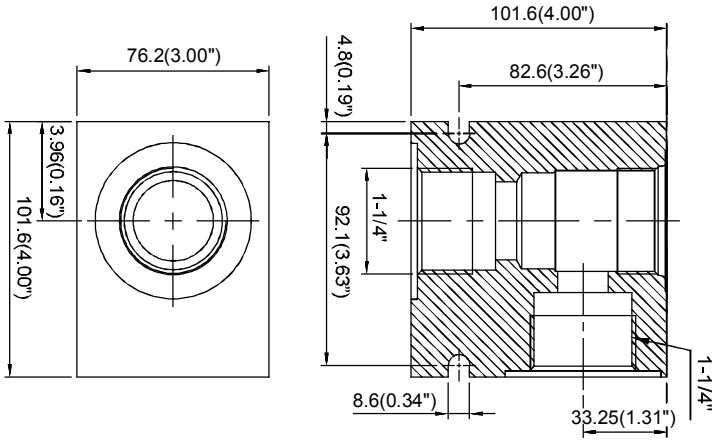

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CS12 - 2NB - ✱✱ - A ✱ (※1 ※2 ※3)

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP


※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)

CAVITY 孔口	CS12-2NB
Dimensions on VF1223	尺寸在VF1223

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS12-2NB-✱✱-A	1/ 2	0.78 (1.72 lbs)
	SAE8	
CS12-2NB-✱✱-B	3/4	
	SAE12	

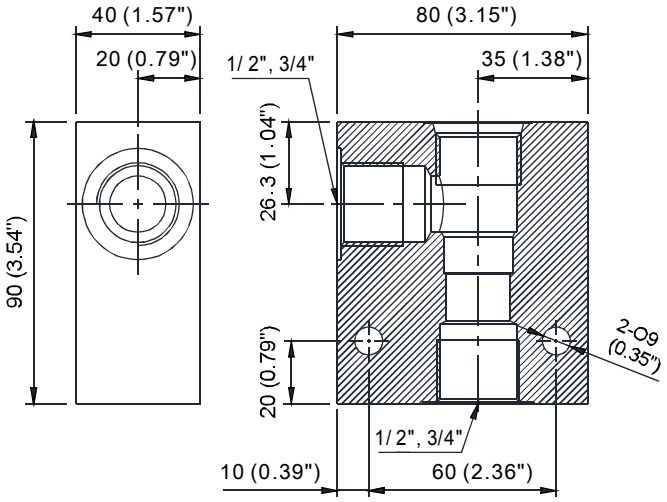

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CS08 - 2NY - ✱✱ - A ✱ (※1 ※2 ※3)

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口


※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)

D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)


CAVITY 孔口	**CS08-2NY**
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	**Ports** 接口	**Weight** 重量 Kg(lbs)
CS08-2NY-✱✱-A	1 /4 SAE4	0.25 (0.55 lbs)
CS08-2NY-✱✱-B	3/8 SAE6	

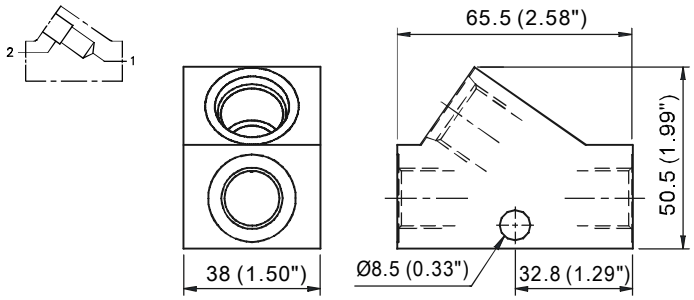


CAVITY 孔口	**CS10-2NY**
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	**Ports** 接口	**Weight** 重量 Kg(lbs)
CS10-2NY-✱✱-A	1 /2 SAE8	0.48 (1.06 lbs)
CS10-2NY-✱✱-B	3/8 SAE6	

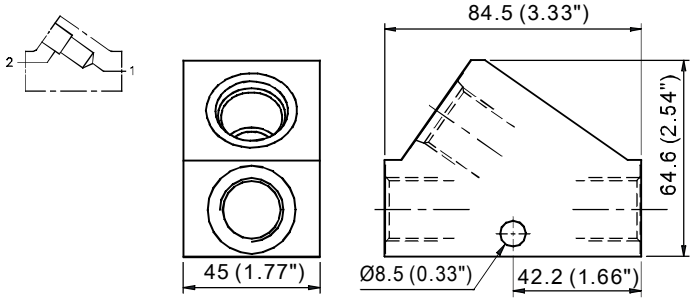


CAVITY 孔口	**CS12-2NY**
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	**Ports** 接口	**Weight** 重量 Kg(lbs)
CS12-2NY-✱✱-A	1 /2 SAE8	0.85 (1.87 lbs)
CS12-2NY-✱✱-B	3/4 SAE12	

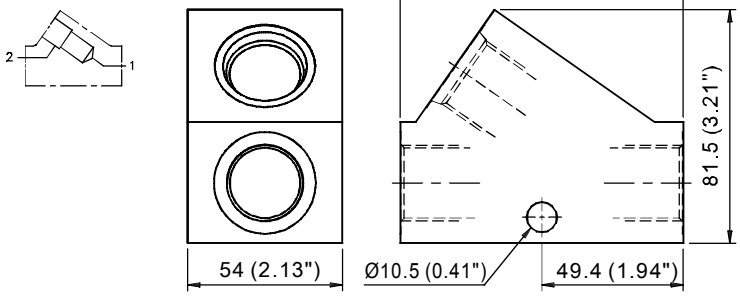

CAVITY 孔口	**CS16-2NY**
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	**Ports** 接口	**Weight** 重量 Kg(lbs)
CS16-2NY-✱✱-A	3/4 SAE12	1.15 (2.54 lbs)
CS16-2NY-✱✱-B	1 SAE16	

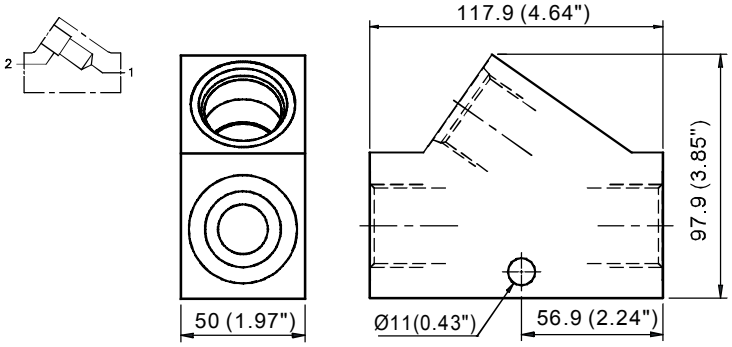

MAX.PRESSURE	**3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron valves; contact our factory for details

註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CS08 - 3N - ✱✱ - A ✱ (※1 ※2 ※3)


※1 Threaded Type 螺紋規格
1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質
NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口	CS08-3N
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS08-3N-✱✱-A	3/ 8 SAE6	0.37 (0.82 lbs)
CS08-3N-✱✱-B	1/ 4 SAE4	

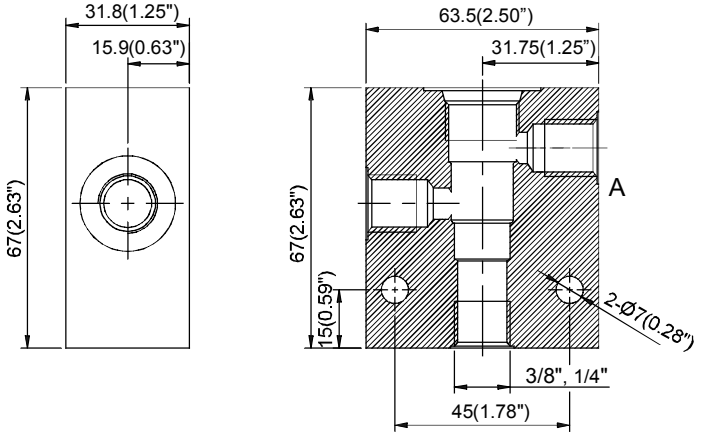


CAVITY 孔口	CS10-3N
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS10-3N-✱✱-A	3/8 SAE6	0.46 (1.01 lbs)
CS10-3N-✱✱-B	1/ 2 SAE8	0.55 (1.21 lbs)

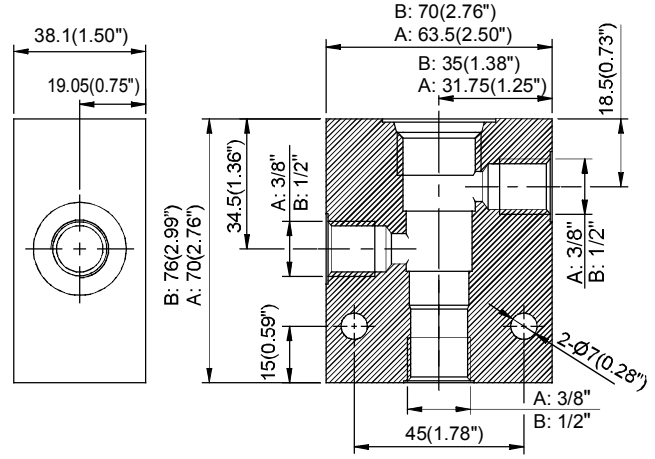

CAVITY 孔口	CS12-3N
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS12-3N-✱✱-A	1/ 2 SAE8	0.92 (2.03 lbs)
CS12-3N-✱✱-B	3/ 4 SAE12	

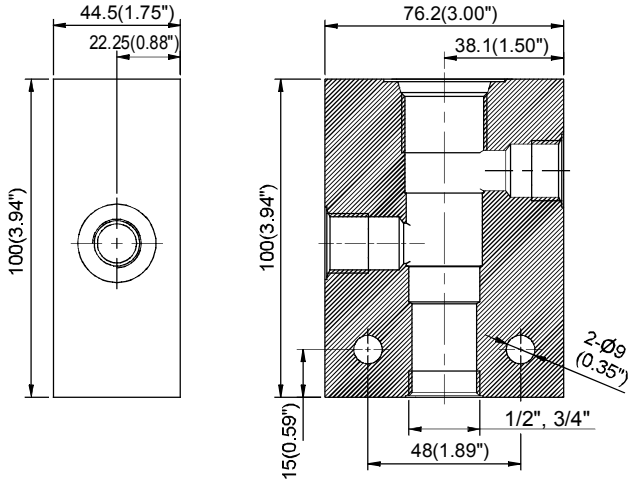

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CS16 - 3N - ** - A * (※1 ※2 ※3)

※1 **Threaded Type** 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP


※2 **Ports** 接口

※3 **Body Material** 閥體材質

NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口	CS16-3N
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS16-3N-**-A	3/4 SAE12	1.47 (3.24 lbs)
CS16-3N-**-B	1 SAE16	

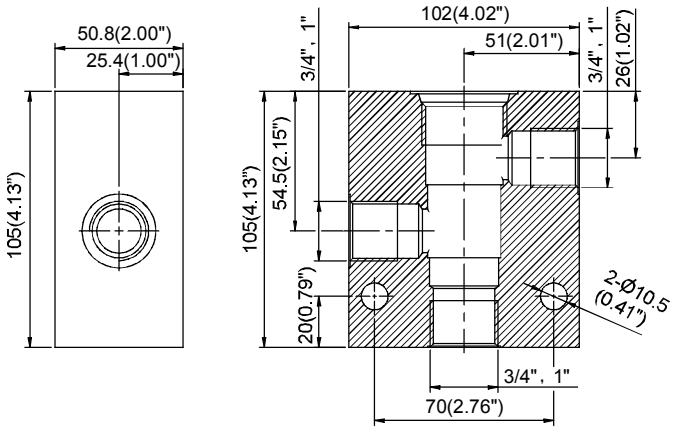

CAVITY 孔口	CS20-3N
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS20-3N-**-A	1-1/ 4 SAE20	2.33 (5.14 lbs)

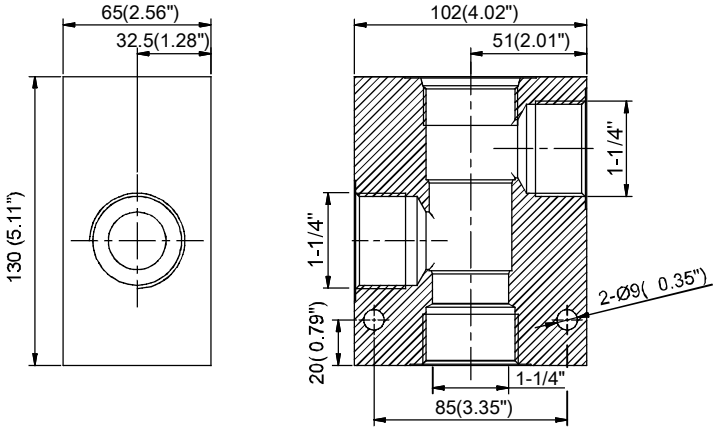

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CS08 - 3S - ✱✱ - A ✱ (※1 ※2 ※3)


※1 **Threaded Type** 螺紋規格
1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 **Ports** 接口

※3 **Body Material** 閥體材質
NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口	CS08-3S
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS08-3S-✱✱-A	3/8	0.33 (0.73 lbs)
	SAE6	

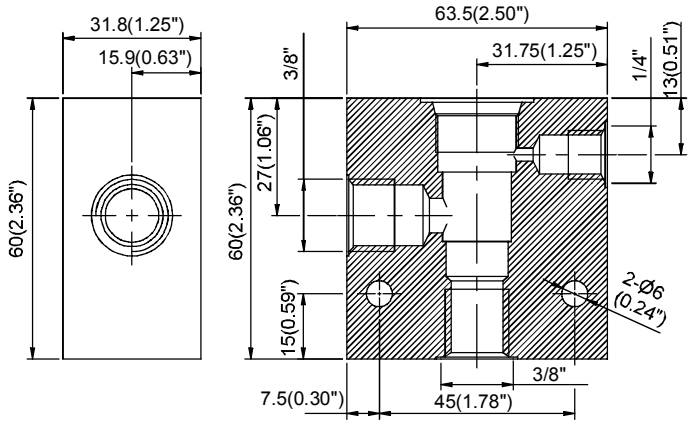


CAVITY 孔口	CS10-3S
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS10-3S-✱✱-A	1/ 2	0.46 (1.01 lbs)
	SAE8	
CS10-3S-✱✱-B	3/8	
	SAE6	

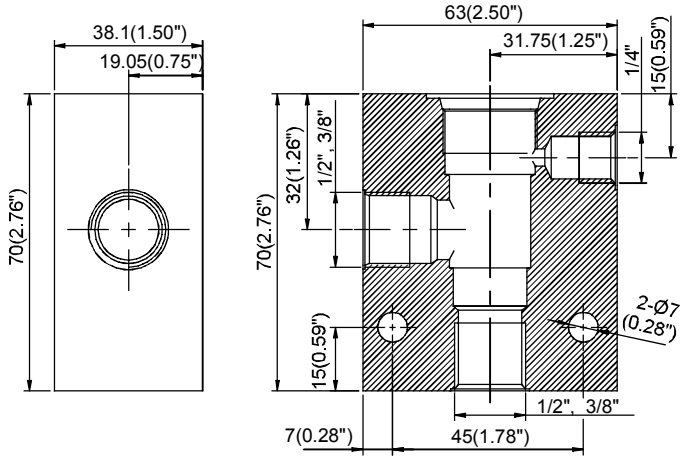

CAVITY 孔口	CS12-3S
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS12-3S-✱✱-A	3/4	0.81 (1.79 lbs)
	SAE12	

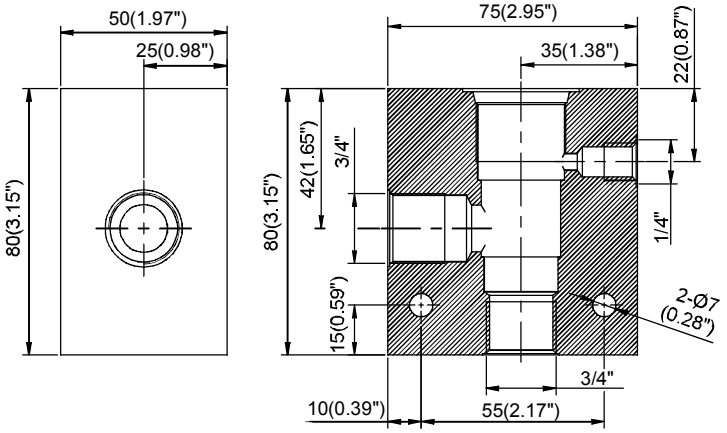

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CS16 - 3S - ** - A * (※1 ※2 ※3)

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP


※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口	CS16-3S
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS16-3S-**-A	1 / SAE16	1.11 (2.45 lbs)

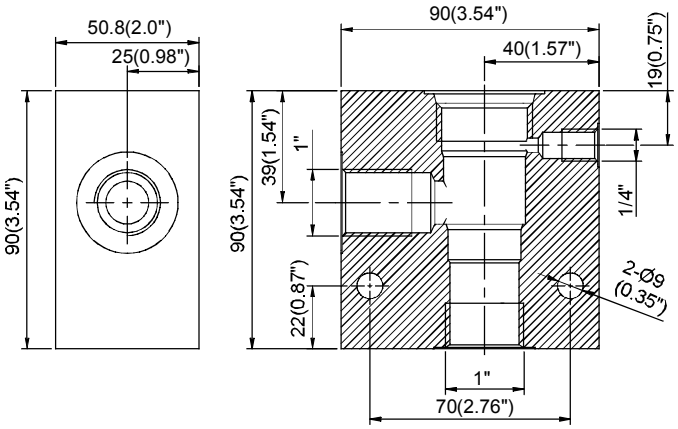

CAVITY 孔口	CS20-3S
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS20-3S-**-A	1-1/4 / SAE20	1.93 (4.25 lbs)

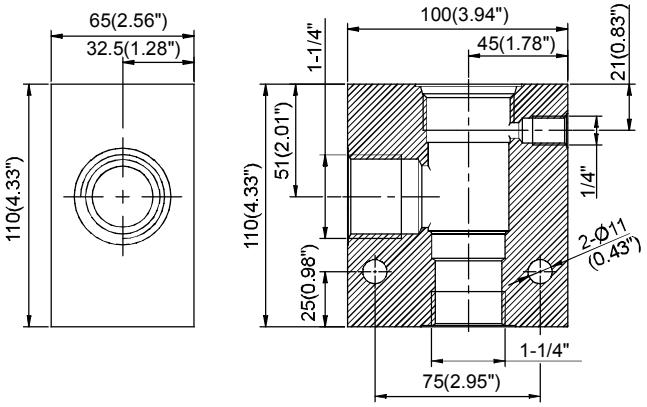

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CS08 - 4N - ** - A * (※1 ※2 ※3)


※1 Threaded Type 螺紋規格
1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質
NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口 CS08-4N
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS08-4N-**-A	3/8 SAE6	0.45 (0.99 lbs)

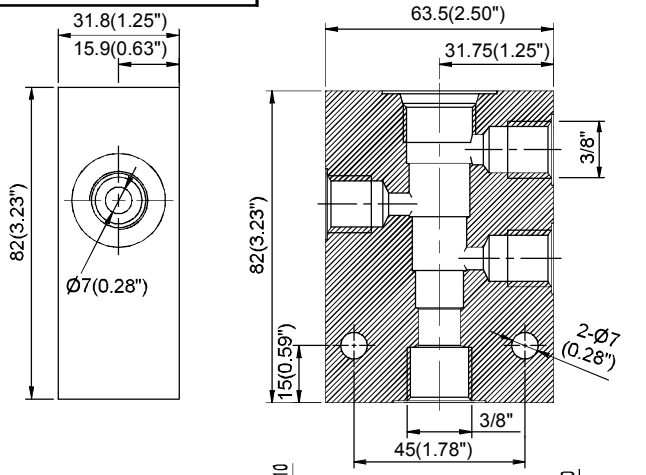


CAVITY 孔口 CS10-4N
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS10-4N-**-A	1/ 2 SAE8	0.55 (1.21 lbs)
CS10-4N-**-B	3/8 SAE6	
CS10-4N-**-D	SAE10	

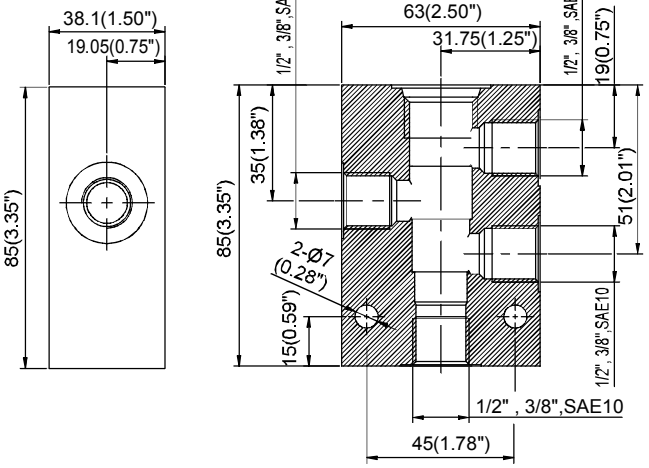

CAVITY 孔口 CS12-4N
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS12-4N-**-A	3/4 SAE12	1.78 (3.92 lbs)
CS12-4N-**-B	1 SAE16	

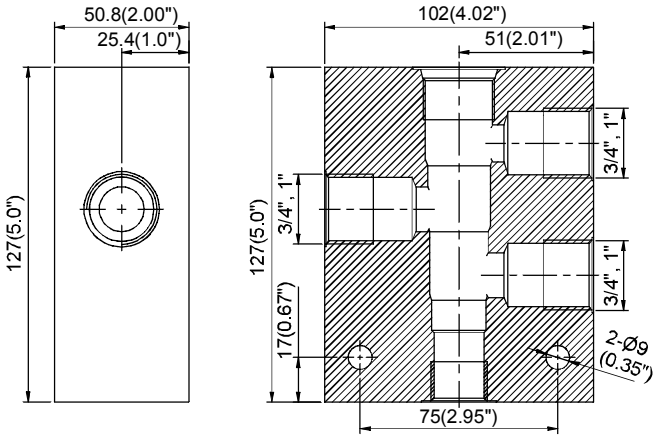

MAX.PRESSURE **3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CS16 - 4N - ** - A * (※1 ※2 ※3)


※1 Threaded Type 螺紋規格
1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質
NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口	CS16-4N
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS16-4N-**-A	3/4 / SAE12	1.82 (4.01 lbs)
CS16-4N-**-B	1 / SAE16	

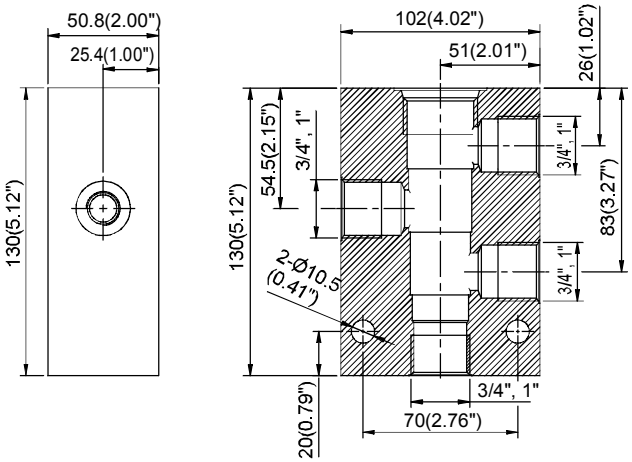

CAVITY 孔口	CS20-4N
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS20-4N-**-A	1 / SAE16	3.17 (6.99 lbs)

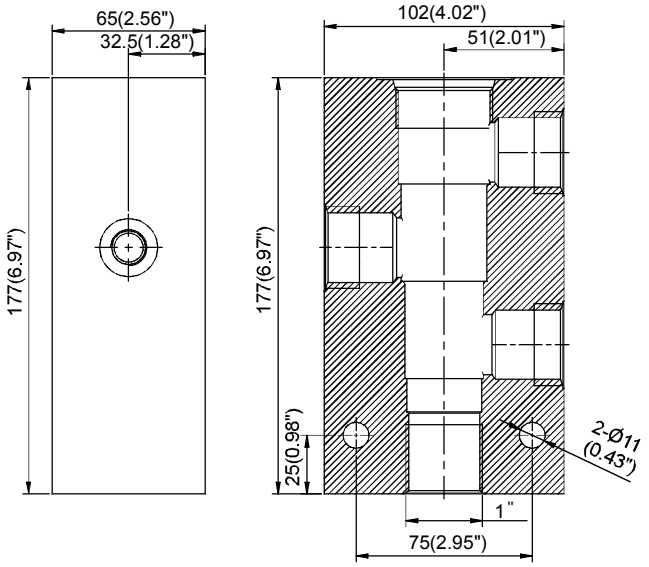

MAX.PRESSURE **3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CS10A - 4N - ** (※1) - A (※2) * (※3)


※1 Threaded Type 螺紋規格
1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質
NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口	CS10A-4N
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS10A-4N-**- A	3/8 SAE6	0.49 (1.01 lbs)
CS10A-4N-**- B	1/4 SAE4	
CS10A-4N-**- C	1/ 2 SAE8	

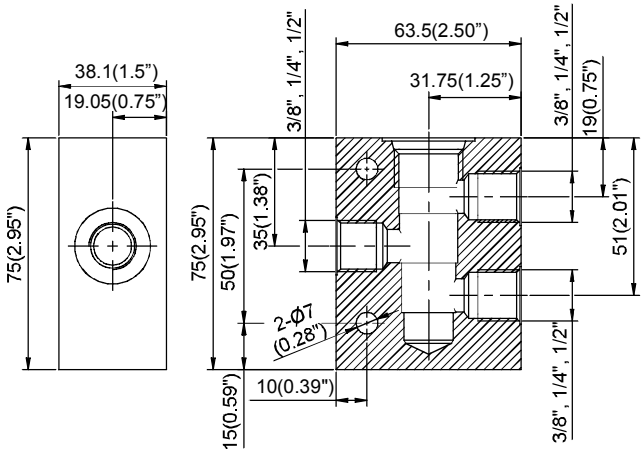


CAVITY 孔口	CS12A-4N
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS12A-4N-**- A	3/4 SAE12	1.68 (3.70 lbs)
CS12A-4N-**- B	1 SAE16	
CS12A-4N-**- C	1/ 2 SAE8	
CS12A-4N-**- D	1/2,3/4 SAE8,12	

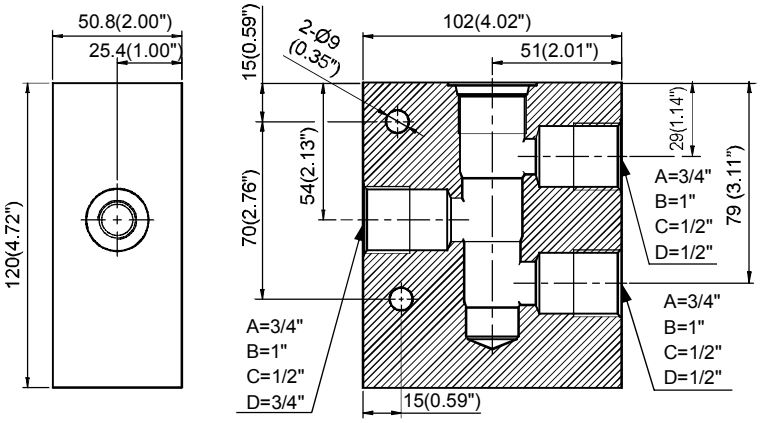

CAVITY 孔口	CS16A-4N
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CS16A-4N-**- A	3/4 SAE12	1.61 (3.55 lbs)
CS16A-4N-**- B	1 SAE16	

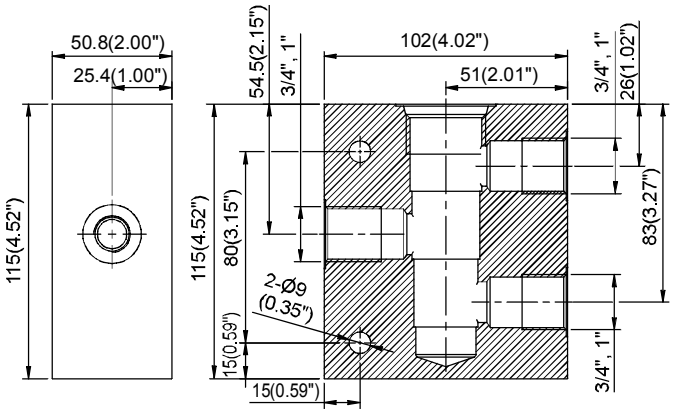

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST - 2A - ✱✱ - A ✱ (※1 ※2 ※3)

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質


NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)

D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)

S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口	**CST-2A**
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-2A-✱✱ - A	3/8 SAE6	0.65 (1.43 lbs)
CST-2A-✱✱ - B	1/ 2 SAE8	
CST-2A-✱✱ - C	3/4 SAE12	

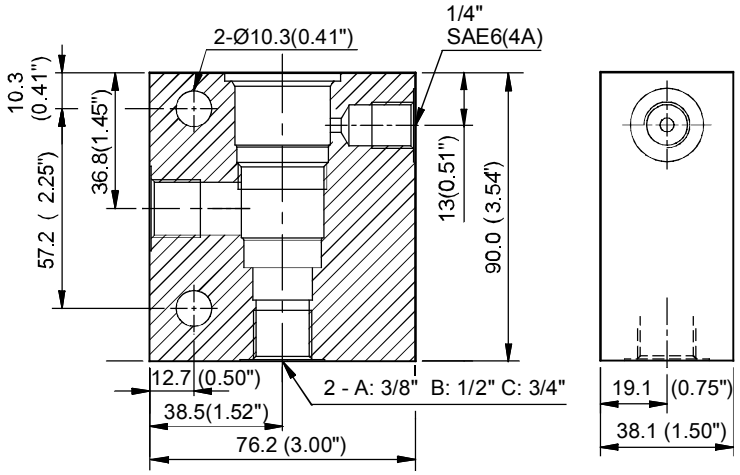


CAVITY 孔口	**CST-3A**
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-3A-✱✱ - A	3/8 SAE6	0.48 (1.06 lbs)
CST-3A-✱✱ - B	1/ 2 SAE8	
CST-3A-✱✱ - C	3/4 SAE12	
CST-3A-✱✱ - D	SAE10	

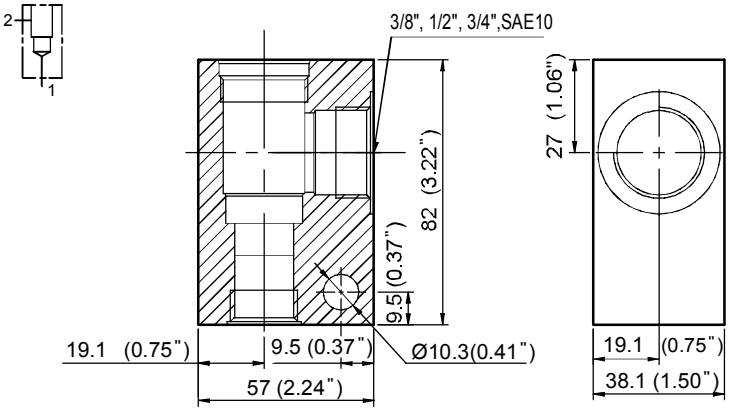

CAVITY 孔口	**CST-5A**
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-5A-✱✱ - A	3/8 SAE6	0.38 (0.84lbs)
CST-5A-✱✱ - B	1/ 2 SAE8	

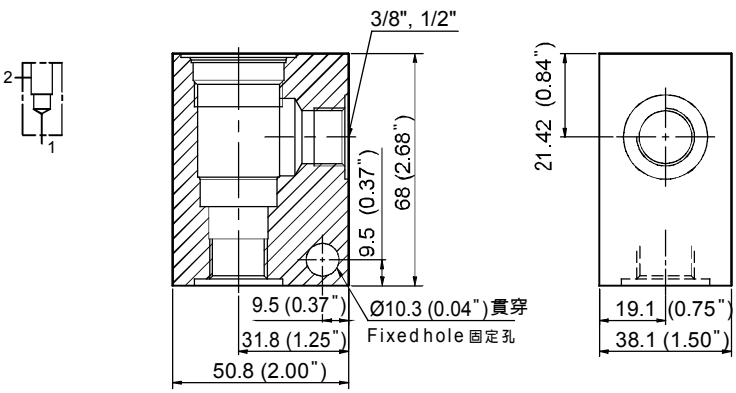

MAX.PRESSURE **3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details

註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST - 8A - ✱✱ - A ✱ (※1 ※2 ※3)


※1 Threaded Type 螺紋規格
1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質
NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口	CST-8A
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST- 8A - ✱✱ - A	1/4 SAE4	0.24 (0.44 lbs)
CST- 8A - ✱✱ - B	3/8 SAE6	

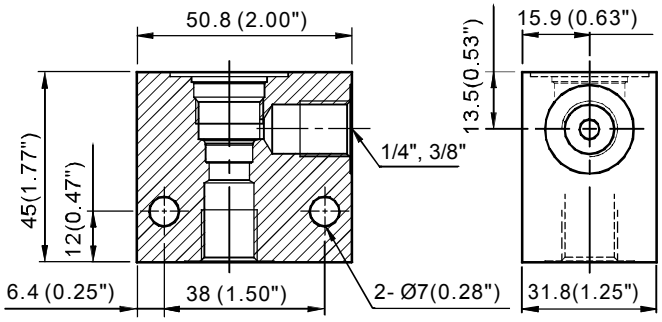


CAVITY 孔口	CST-10A
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-10A- ✱✱ - A	3/8 SAE6	0.27 (0.60 lbs)
CST-10A- ✱✱ - B	1/ 2 SAE8	
CST-10A- ✱✱ - C	3/4 SAE12	0.45 (0.99 lbs)

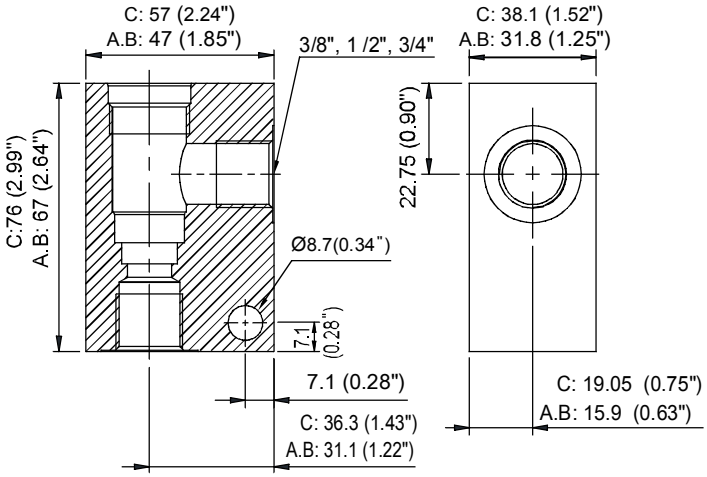

CAVITY 孔口	CST-11A
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-11A- ✱✱ - A	1/4 SAE4	0.44 (0.97 lbs)
CST-11A- ✱✱ - B	3/8 SAE6	
CST-11A - ✱✱ - C	1/ 2 SAE8	

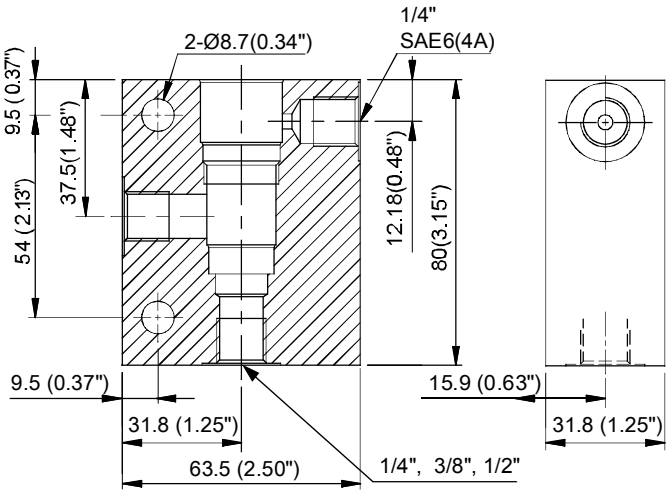

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST - 13A - ✱✱ - A ✱ (※1 ※2 ※3)

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)


D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)

S : Steel (Galvanization) S：鋼質(鍍鋅)

CAVITY 孔口 **CST-13A**

Dimensions on Appendices-A 尺寸在附錄A


ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-13A-✱✱-A	1/4	0.27 (0.60 lbs)
	SAE4	
CST-13A-✱✱-B	3/8	
	SAE6	
CST-13A-✱✱-C	1/ 2	
	SAE8	

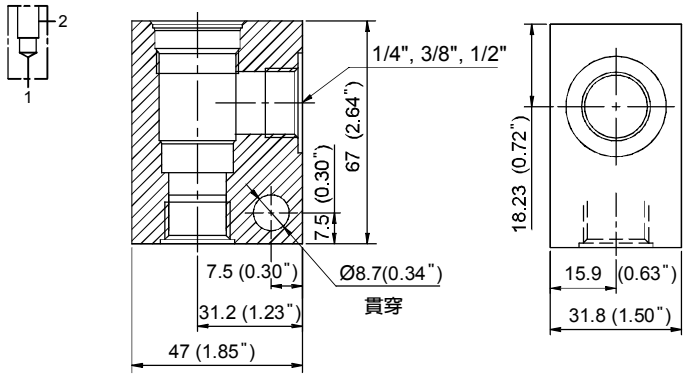

CAVITY 孔口 **CST-16A**

Dimensions on Appendices-A 尺寸在附錄A


ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-16A-✱✱-A	3/4	1.2 (2.65 lbs)
	SAE12	
CST-16A-✱✱-B	1	
	SAE16	
CST-16A-✱✱-C	1-1/4	
	SAE20	

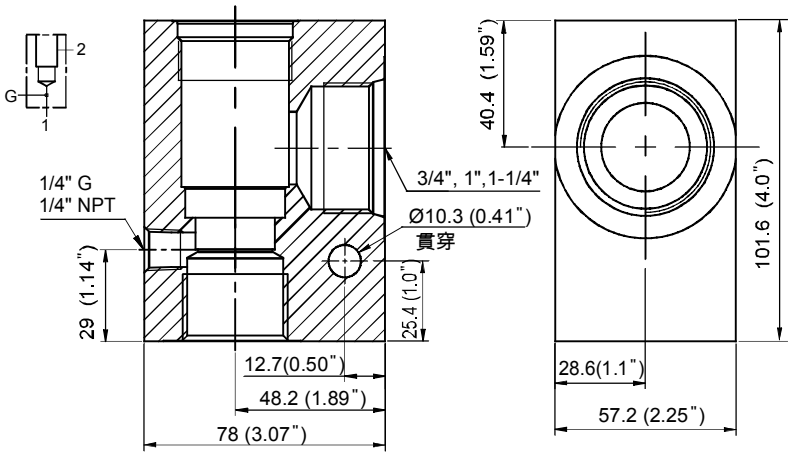

CAVITY 孔口 **CST-17A**

Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-17A-✱✱-A	3/4	1.69 (3.73 lbs)
	SAE12	
CST-17A-✱✱-B	1	
	SAE16	
CST-17A-✱✱-C	1-1/4	
	SAE20	

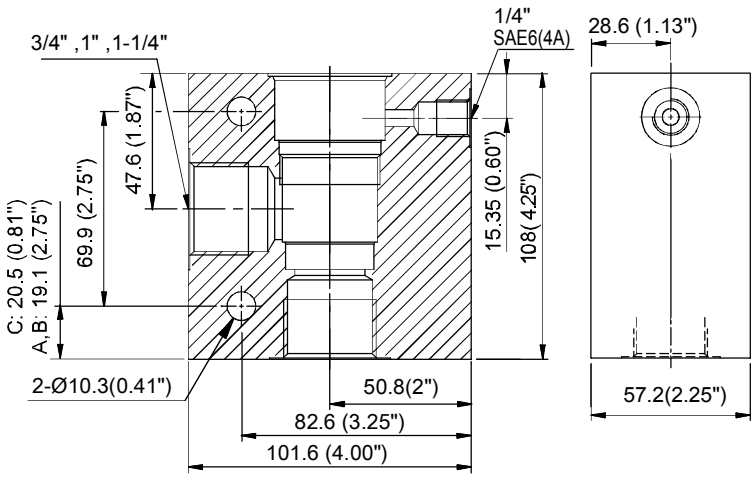

MAX.PRESSURE **3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details

註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST - 18A - ✱✱ (※1) - A (※2) ✱ (※3)

※1 Threaded Type 螺紋規格
NONE (Standard):Flange type 無（標準）:法蘭型
1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP


※2 Ports 接口

※3 Body Material 閥體材質
NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)

CAVITY 孔口	CST-18A
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-18A-A（*）	1-1/2	2.83 (6.24 lbs)
CST-18A-✱✱ - B	1-1/4	1.97 (4.34 lbs)
	SAE20	
CST-18A-✱✱ - C	1	
	SAE16	
CST-18A-✱✱ - D	1-1/2	
	SAE24	


(*) Flange type only. 僅限法蘭型.
Note：For further information, such like: Dimensions of Threaded type and Flange type..... Please contact us.
註:對於詳細的資訊,像是:螺紋型及法蘭型的法蘭尺寸等..... 請與我們聯絡.

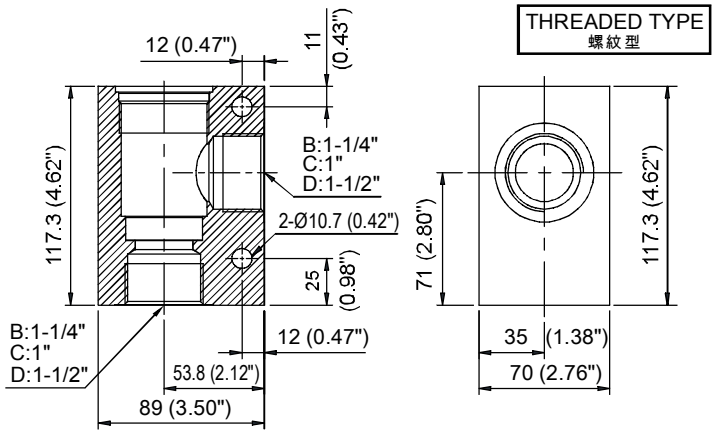

CAVITY 孔口	CST-19A
Dimensions on Appendices-A	尺寸在附錄A


ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-19A- A（*）	1-1/2	2.80 (6.17 lbs)
CST-19A-✱✱ - B	1-1/4	2.65 (5.84 lbs)
	SAE20	
CST-19A-✱✱ - C	1-1/2	
	SAE24	

(*) Flange type only. 僅限法蘭型.
Note：For further information, such like: Dimensions of Threaded type and Flange type..... Please contact us.
註:對於詳細的資訊,像是:螺紋型及法蘭型的法蘭尺寸等..... 請與我們聯絡.

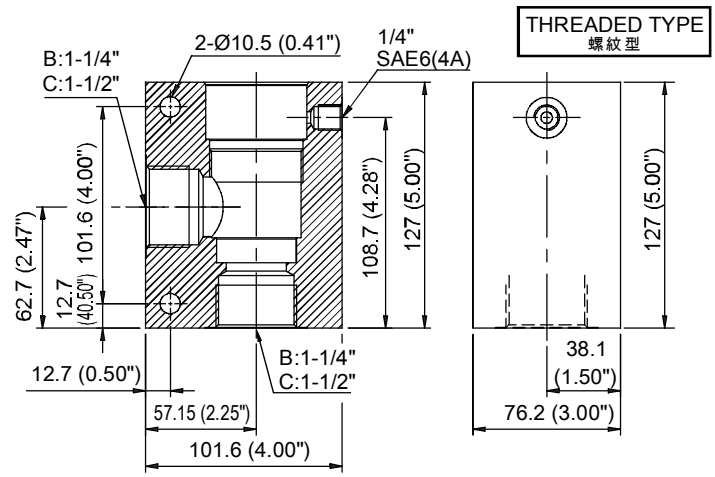

CAVITY 孔口	CST-24A
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-24A-✱✱-A	1	3.92 (8.64 lbs)
	SAE16	
CST-24A-✱✱-B	1-1/4	
	SAE20	

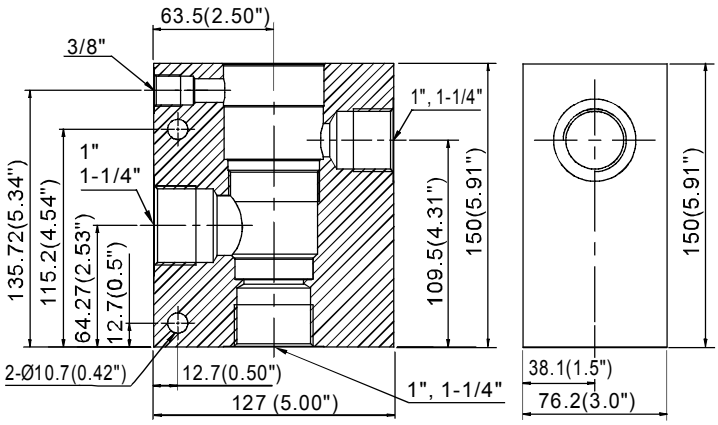

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST - 31A - ✱✱ - A ✱ (※1 ※2 ※3)

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質


NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)

D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)

S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口	CST-31A
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-31A-✱✱ -A	1/4 / SAE4	0.73 (1.61 lbs)
CST-31A-✱✱ -B	3/8 / SAE6	
CST-31A-✱✱ -C	1/ 2 / SAE8	
CST-31A-✱✱ -D	SAE10	

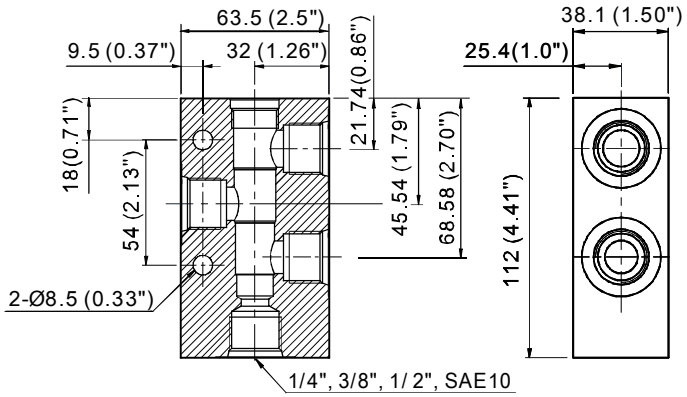


CAVITY 孔口	CST-32A
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-32A-✱✱ -A	1/ 2 / SAE8	1.33 (2.93 lbs)
CST-32A-✱✱ -B	3/4 / SAE12	
CST-32A-✱✱ -C	3/8 / SAE6	
CST-32A-✱✱ -D	SAE10	

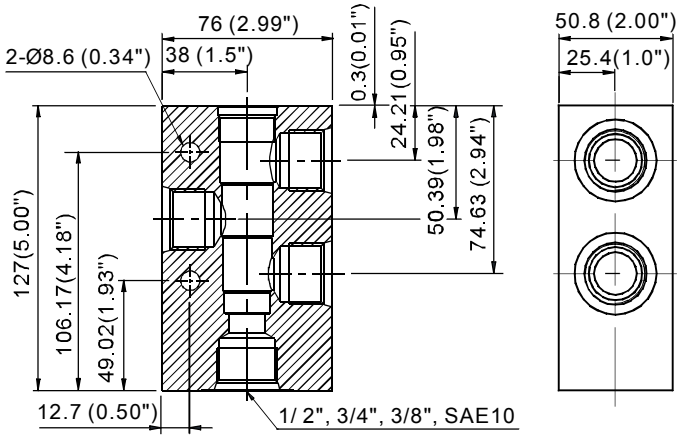

CAVITY 孔口	CST-33A
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-33A-✱✱ -A	3/4 / SAE12	2.46 (5.42 lbs)
CST-33A-✱✱ -B	1 / SAE16	
CST-33A-✱✱ -C	1-1/4 / SAE20	

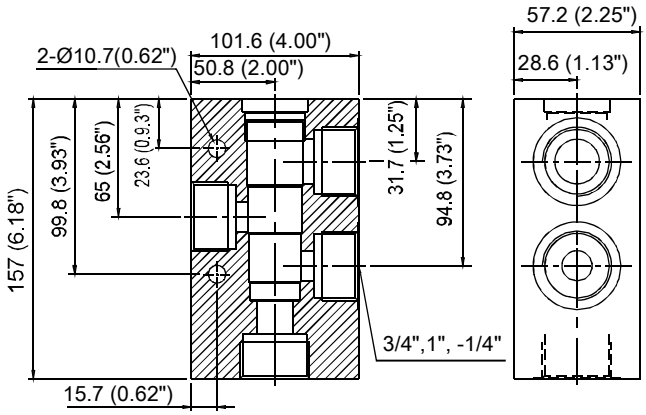

MAX.PRESSURE **3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details

註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST - 34A - ** - A *
	※1 ※2 ※3


※1 Threaded Type 螺紋規格
1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質
NONE (Standard): Aluminum-alloy (Anodized) 無 (標準)：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口 CST-34A
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-34A-** -A	1 / SAE16	5.06 (11.16 lbs)
CST-34A-** -B	1-1/4 / SAE20	

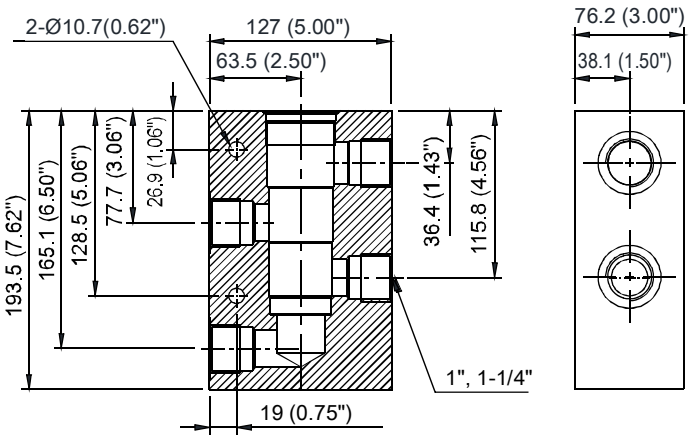


CAVITY 孔口 CST-162A
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-162A-** -A	1/4 / SAE4	0.13 (0.29 lbs)
CST-162A-** -B	3/8 / SAE6	
CST-162A-** -C	1 /2 / SAE8	0.25 (0.55 lbs)

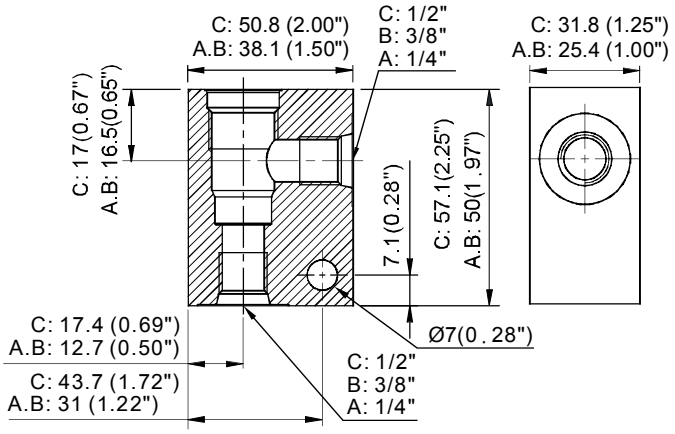

CAVITY 孔口 CST-163A
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-163A-** -A	1/4 / SAE4	0.23 (0.51 lbs)
CST-163A-** -B	3/8 / SAE6	

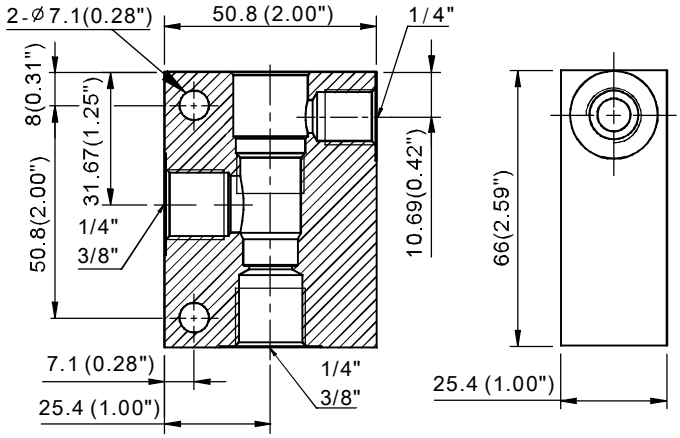

MAX.PRESSURE **3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST - 31AS - ✱✱ - A ✱ (※1 ※2 ※3)

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP


※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口	**CST-31AS**
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-31AS-✱✱ -A	1/4	0.73 (1.61 llbs)
	SAE4	
CST-31AS-✱✱ -B	3/8	
	SAE6	
CST-31AS-✱✱-C	1/ 2	
	SAE8	
CST-31AS-✱✱-D	SAE10	

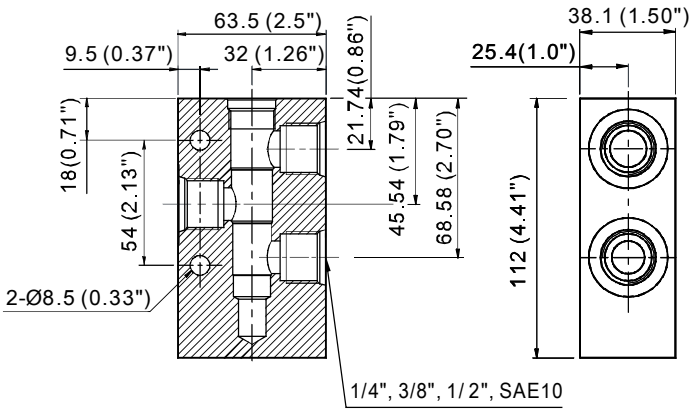


CAVITY 孔口	**CST-32AS**
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-32AS-✱✱ -A	1/ 2	1.33 (2.93 lbs)
	SAE8	
CST-32AS-✱✱ -B	3/4	
	SAE12	
CST-32AS-✱✱-C	3/8	
	SAE6	
CST-32AS-✱✱-D	SAE10	

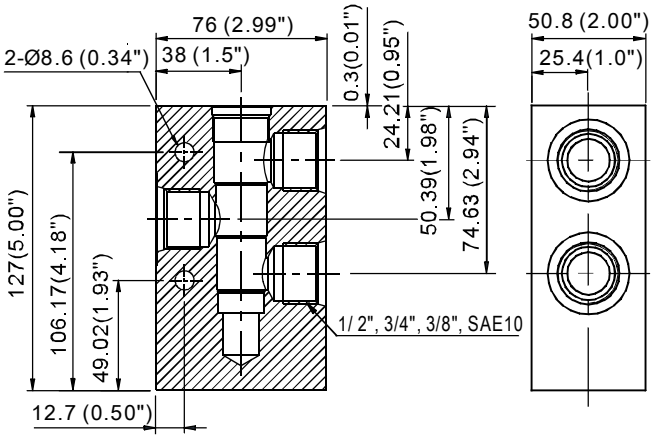

CAVITY 孔口	**CST-33AS**
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-33AS-✱✱ -A	3/4	2.46 (5.42 lbs)
	SAE12	
CST-33AS-✱✱-B	1	
	SAE16	
CST-33AS-✱✱-C	1-1/4	
	SAE20	

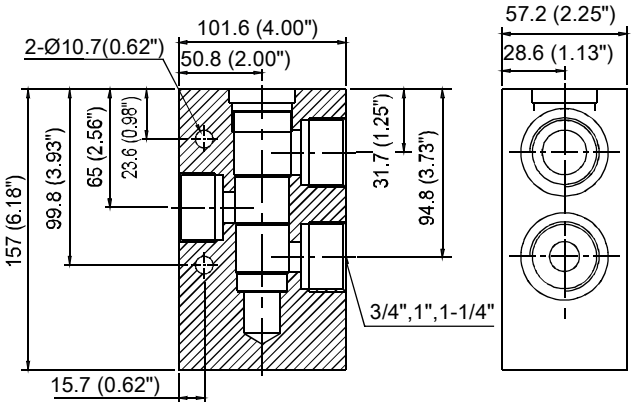

MAX.PRESSURE **3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST - 34AS - ✱✱ - A ✱ (※1 ※2 ※3)

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP


※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)

CAVITY 孔口	CST-34AS
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-34AS-✱✱-A	1 / SAE16	5.06 (11.16 lbs)
CST-34AS-✱✱-B	1-1/4 / SAE20	

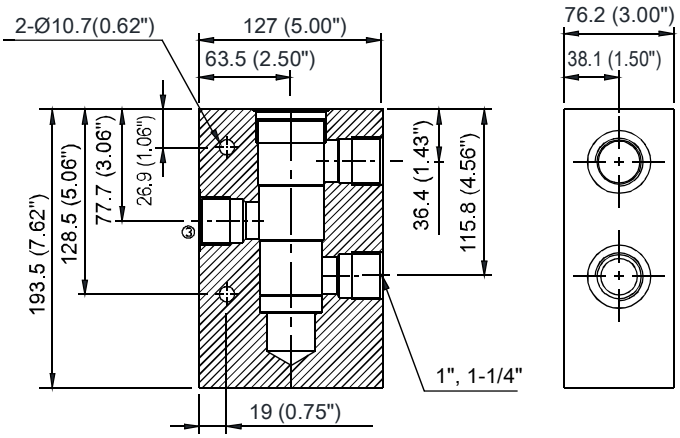

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

Appendices-B
附錄-B

◆

ORDER THE EXPLANATION 訂購說明	CST- 2A VG - ✱✱ - A ✱ (※1 ※2 ※3)

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質

NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)


D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)

S : Steel (Galvanization) S：鋼質(鍍鋅)

CAVITY 孔口 CST-2A VG

Dimensions on Appendices-A 尺寸在附錄A


ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-2A VG-✱✱-A	3/8	0.97 (2.14 lbs)
	SAE6	
CST-2A VG-✱✱-B	1/2	
	SAE8	
CST-2A VG-✱✱-C	3/4	
	SAE12	
CST-2A VG-✱✱-D	SAE10	

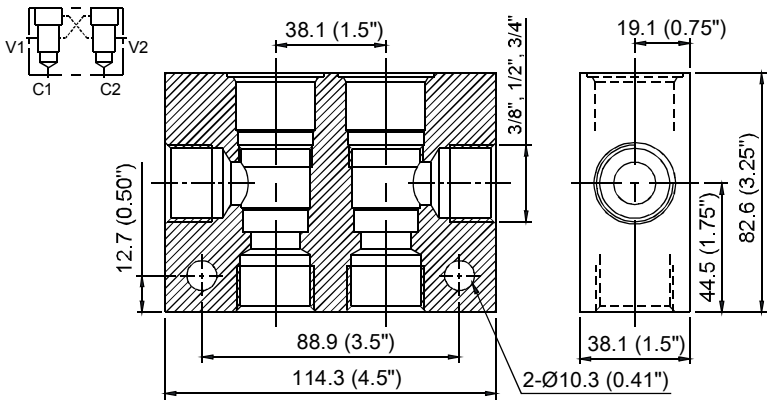

CAVITY 孔口 CST-11A YE

Dimensions on Appendices-A 尺寸在附錄A


ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-11A YE-✱✱-A	1/4	0.66 (1.46 lbs)
	SAE4	
CST-11A YE-✱✱-B	3/8	
	SAE6	
CST-11A YE-✱✱-C	1/2	
	SAE8	
CST-11A YE-✱✱-D	SAE10	

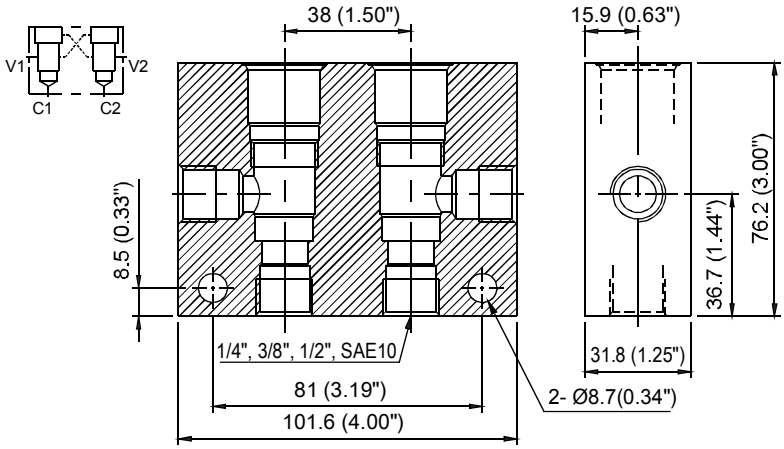

CAVITY 孔口 CST-17A YJ

Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-17A YJ-✱✱-A	3/4	2.59 (5.71 lbs)
	SAE12	
CST-17A YJ-✱✱-B	1	
	SAE16	
CST-17A YJ-✱✱-C	1—1/4	
	SAE20	

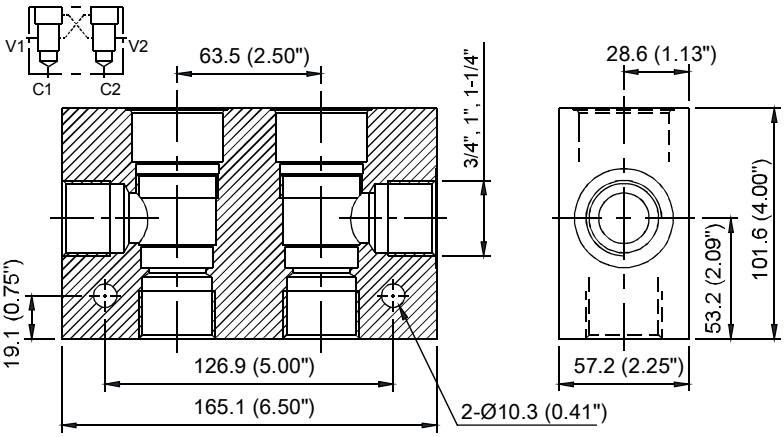

MAX.PRESSURE **3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details

註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST- 19A YM -** - A*
	※1 ※2 ※3


※1 Threaded Type 螺紋規格
1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質
NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口 CST-19A YM
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-19A YM-**-A	1-1/2	5.30 (11.68 lbs)
	SAE24	
CST-19A YM-**-B	1-1/4	
	SAE20	

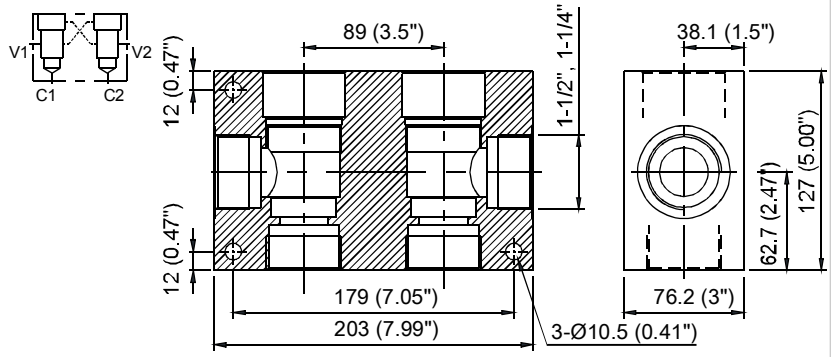


CAVITY 孔口 CST-2A YH
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-2A YH-**-A	3/8	1.05 (2.31 lbs)
	SAE6	
CST-2A YH-**-B	1/2	
	SAE8	
CST-2A YH-**-C	3/4	
	SAE12	

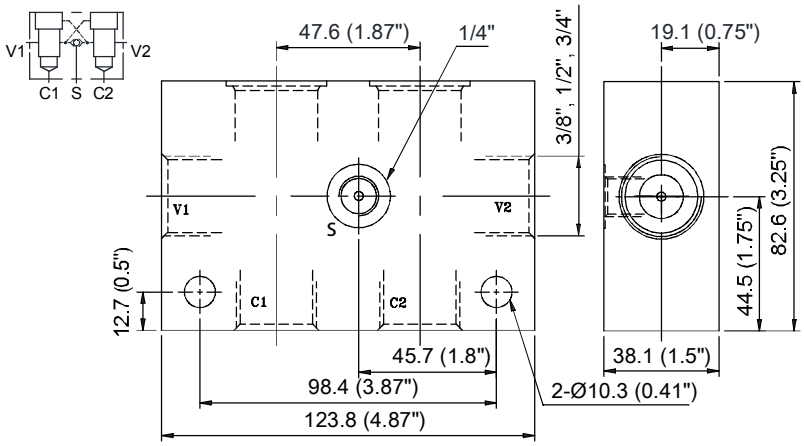

CAVITY 孔口 CST-11A YG
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-11A YG-**-A	1/4	0.66 (1.46 lbs)
	SAE4	
CST-11A YG-**-B	3/8	
	SAE6	
CST-11A YG-**-C	1/2	
	SAE8	
CST-11A YG-**-D	SAE10	

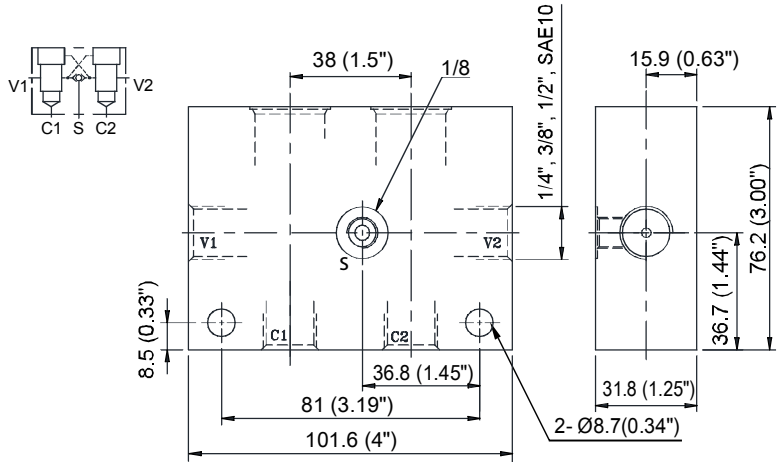

MAX.PRESSURE **3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

Appendices-B
附錄-B

◆

ORDER THE EXPLANATION 訂購說明	CST- 17A YK - ✱✱ (※1) - A (※2) ✱ (※3)

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質


NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)

D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)

S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口	**CST-17A YK**
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-17A YK-✱✱-A	3/4	2.59 (5.71 lbs)
	SAE12	
CST-17A YK-✱✱-B	1	
	SAE16	
CST-17A YK-✱✱-C	1-1/4	
	SAE20	

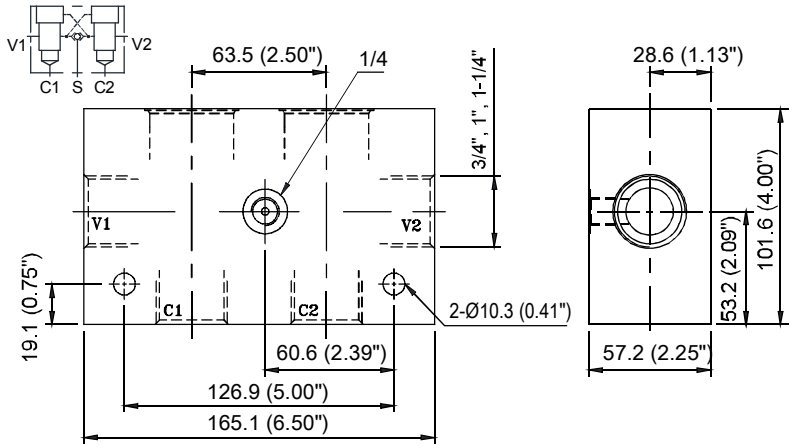

CAVITY 孔口	**CST-19A YN**
Dimensions on Appendices-A	尺寸在附錄A


ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-19A YN-✱✱-A	1-1/4	5.30 (11.68 lbs)
	SAE20	
CST-19A YN-✱✱-B	1	
	SAE16	

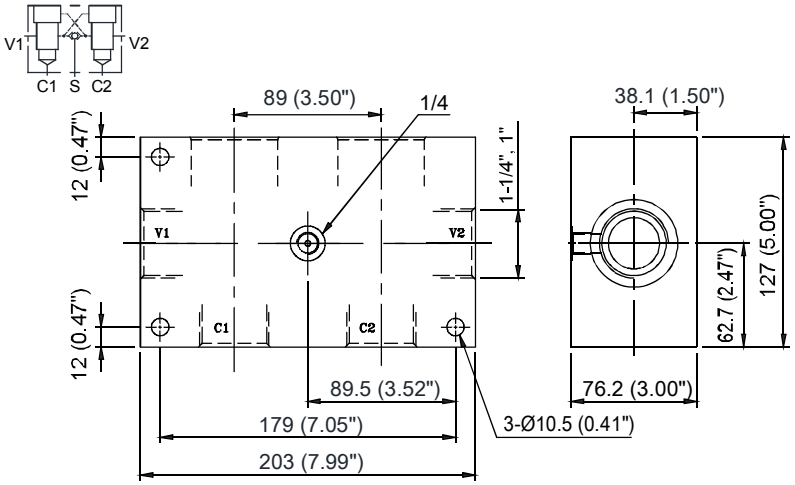

CAVITY 孔口	**CST-2A YD**
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-2 A YD-✱✱-A	3/4	0.97 (2.14 lbs)
	SAE12	

Note: This item only offers two 3G and 4A ports.
註：此項目只供應3G和4A接口

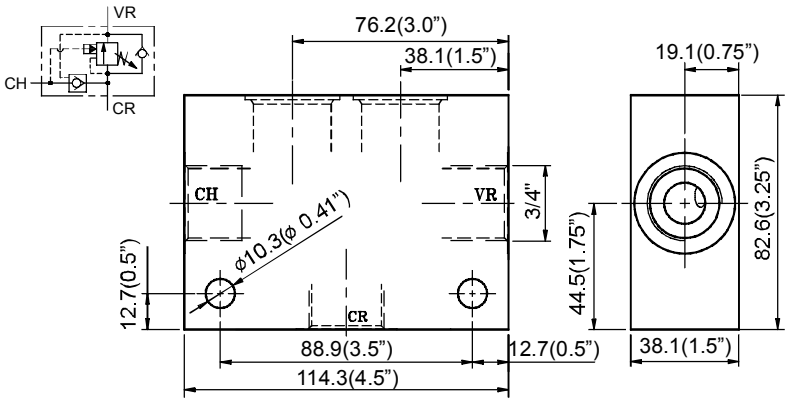

MAX.PRESSURE **3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註：標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST- 3A CE - ✱✱ - A ✱ (※1 ※2 ※3)


※1 Threaded Type 螺紋規格
1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質
NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)
S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口 CST-3A CE
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-3A CE-✱✱-A	3/4 SAE12	0.59 (1.30 lbs)
CST-3A CE-✱✱-B	1/ 2 SAE8	
CST-3A CE-✱✱-C	3/8 SAE6	
CST-3A CE-✱✱-D	1 SAE16	0.83 (1.83 lbs)

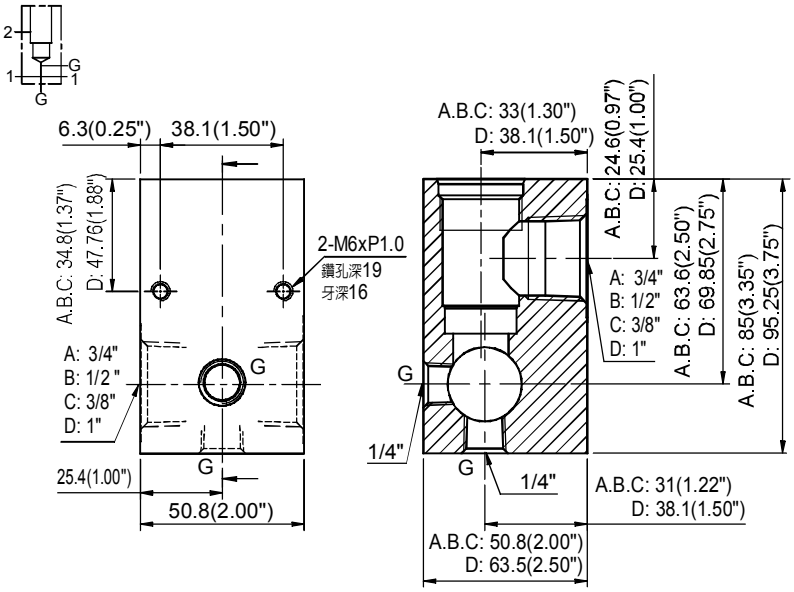

CAVITY 孔口 CST-10A FE
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-10A FE-✱✱-A	3/4 SAE12	0.59 (1.30 lbs)
CST-10A FE-✱✱-B	1/ 2 SAE8	0.42 (0.93 lbs)
CST-10A FE-✱✱-C	3/8 SAE6	

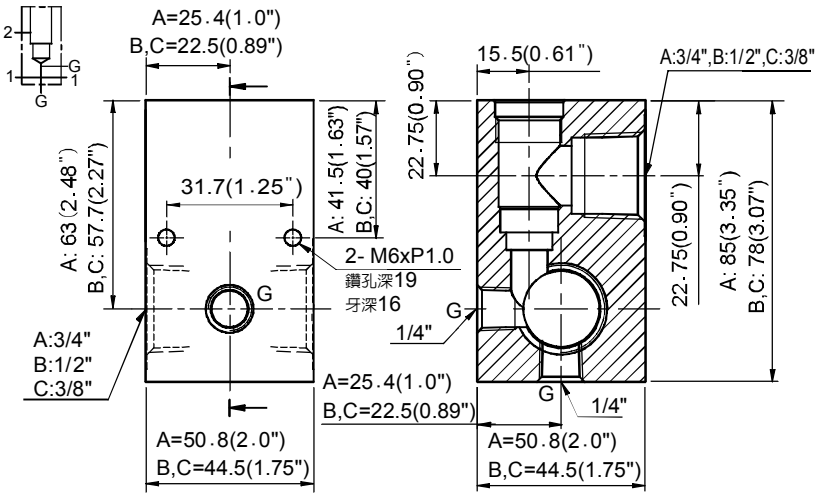

MAX.PRESSURE **3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST- 5A XW - ✱✱ (※1) - A (※2) ✱ (※3)

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質


NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)

D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)

S : Steel (Galvanization) S：鋼質(鍍鋅)


CAVITY 孔口	CST- 5A XW
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-5A XW-✱✱-A	3/8 SAE6	0.93 (2.05 lbs)
CST-5A XW-✱✱-B	1/ 2 SAE8	
CST-5A XW-✱✱-C	SAE10	
CST-5A XW-✱✱-D	3/4 SAE12	

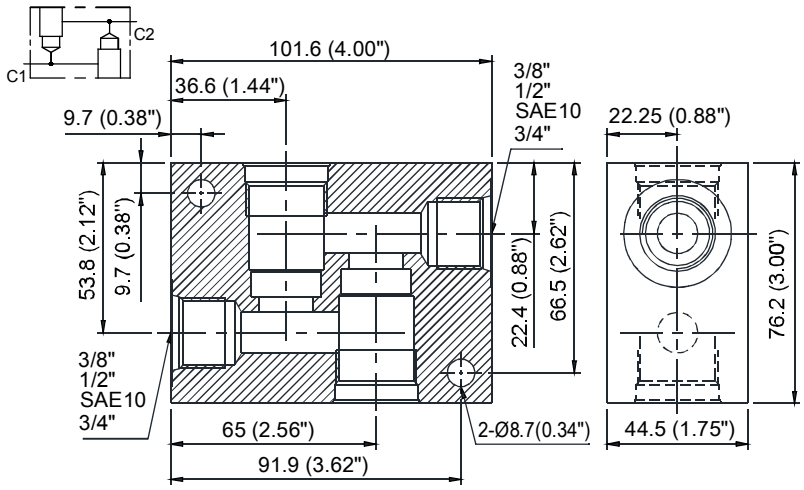

CAVITY 孔口	CST- 10A YF
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-10A YF-✱✱-A	3/8 SAE6	0.64 (1.41 lbs)
CST-10A YF-✱✱-B	1/2 SAE8	

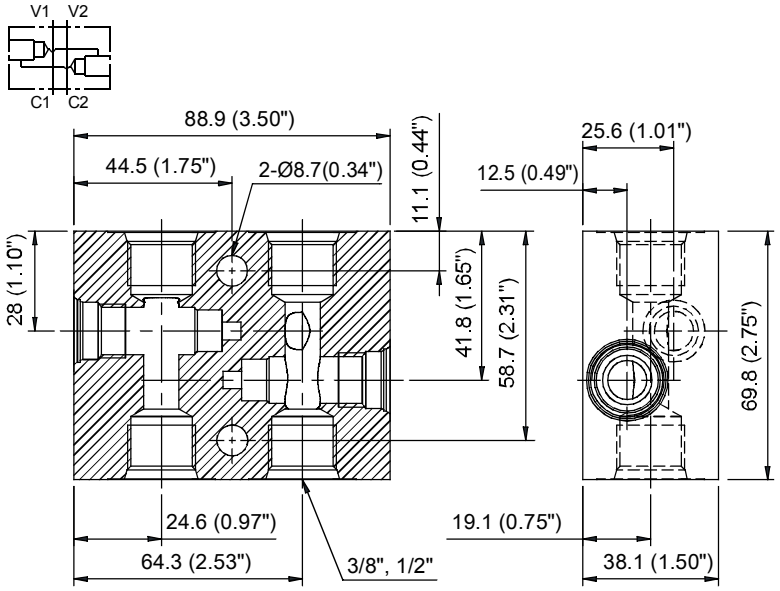

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron and steel valves; contact our factory for details

註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵及鋼製閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST- 11A XE - ✱✱ - A ✱ (※1 ※2 ※3)


※1 Threaded Type 螺紋規格
1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質
NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)


CAVITY 孔口 CST-11A XE
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-11A XE-✱✱-A	3/8 SAE6	0.80 (1.76 lbs)
CST-11A XE-✱✱-B	1/ 2 SAE8	
CST-11A XE-✱✱-C	1/4 SAE4	

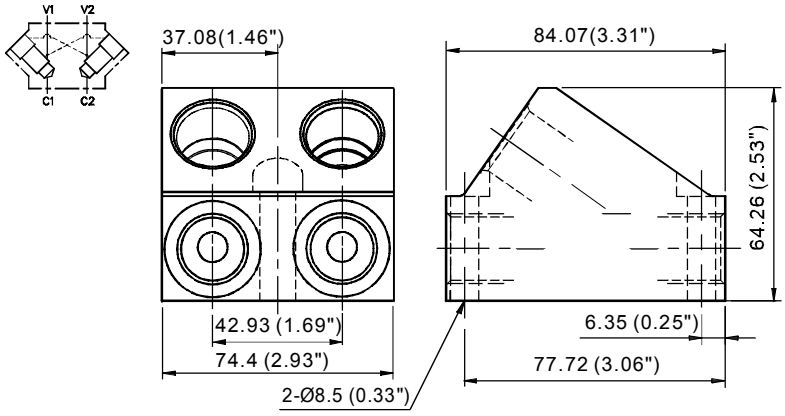


CAVITY 孔口 CST-11A XV
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-11A XV-✱✱-A	3/8 SAE6	0.69 (1.52 lbs)
CST-11A XV-✱✱-B	1/ 2 SAE8	
CST-11A XV-✱✱-C	1/4 SAE4	

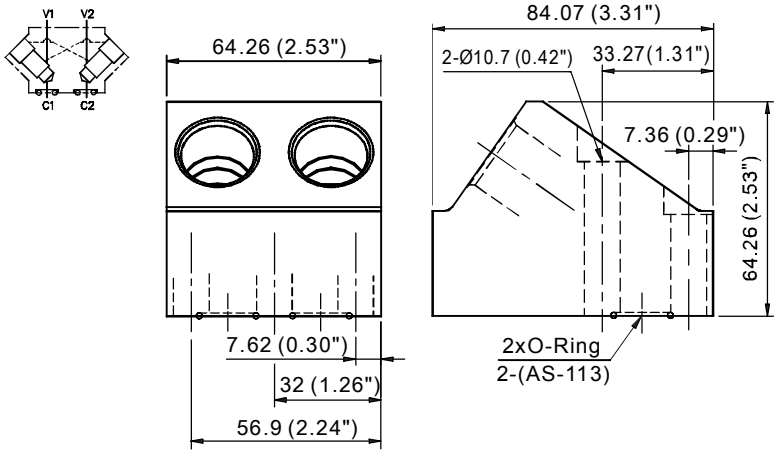

CAVITY 孔口 CST-5A DC
Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-5A DC-✱✱-A	3/8 SAE6	0.41 (0.90 lbs)
CST-5A DC-✱✱-B	1/2 SAE8	
CST-5A DC-✱✱-C	SAE10	

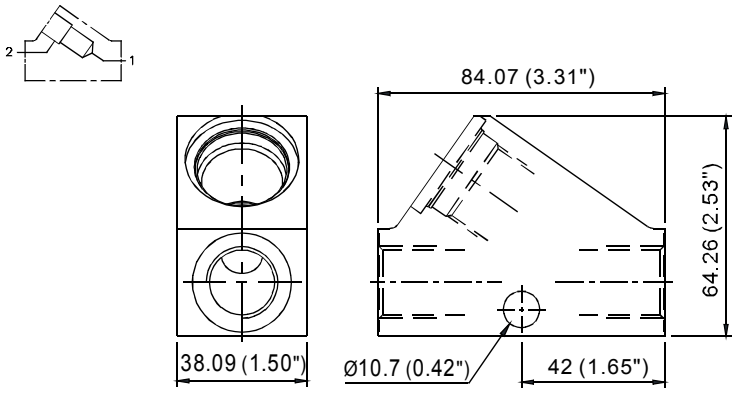

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST- 5A VF - ✱✱- A ✱ (※1 ※2 ※3)

※1 Threaded Type 螺紋規格

1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP

※2 Ports 接口

※3 Body Material 閥體材質


NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)

D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)

CAVITY 孔口 **CST-5A VF**

Dimensions on Appendices-A 尺寸在附錄A


ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-5A VF-✱✱-A	3/4	1.32 (2.91 lbs)
	SAE12	
CST-5A VF-✱✱-B	1	
	SAE16	
CST-5A VF-✱✱-C	1 1/4	
	SAE20	

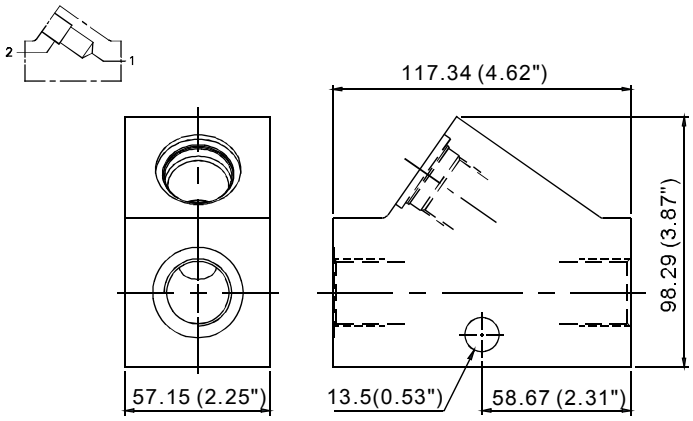

CAVITY 孔口 **CST-13A GC**

Dimensions on Appendices-A 尺寸在附錄A


ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-13A GC-✱✱-A	3/8	0.19 (1.42 lbs)
	SAE6	
CST-13A GC-✱✱-B	1/ 2	0.32 (0.71 lbs)
	SAE8	
CST-13A GC-✱✱-C	1/4	0.19 (1.42 lbs)
	SAE4	

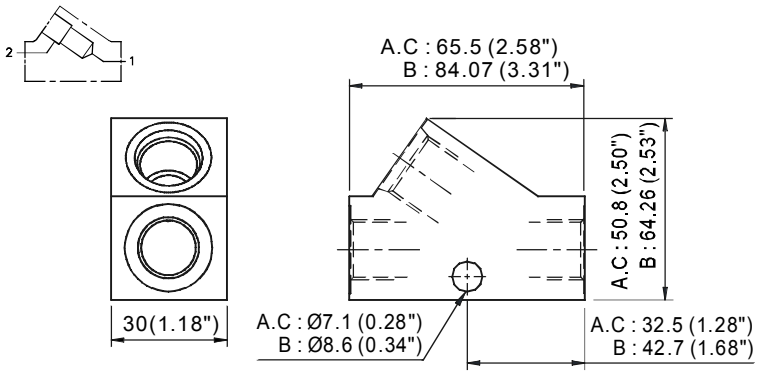

CAVITY 孔口 **CST-16A IC**

Dimensions on Appendices-A 尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-16A IC-✱✱-A	1/ 2	1.15 (2.54 lbs)
	SAE8	
CST-16A IC-✱✱-B	3/4	
	SAE12	
CST-16A IC-✱✱-C	1	
	SAE16	

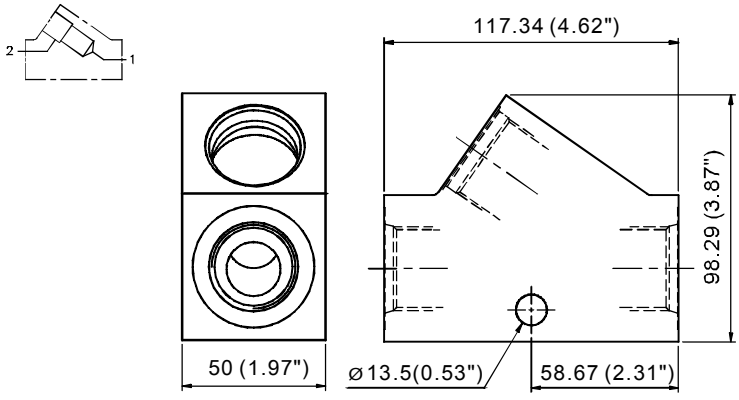

MAX.PRESSURE **3600 psi (250 bar)**

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron valves; contact our factory for details

註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵閥塊,請聯繫工廠。

◆

ORDER THE EXPLANATION 訂購說明	CST-162A AC -**- A * (※1 ※2 ※3)


※1 Threaded Type 螺紋規格
1P: PT 2N: NPT 3G: PF(G) 4A: SAE 5B: BSP


※2 Ports 接口


※3 Body Material 閥體材質
NONE (Standard): Aluminum-alloy (Anodized) 無（標準）：鋁合金(陽極處理)
D : Nodular Ductile-Iron (Galvanization) D：球墨鑄鐵(鍍鋅)

CAVITY 孔口	CST-162A AC
Dimensions on Appendices-A	尺寸在附錄A

ORDERING CODE 訂購代號	Ports 接口	Weight 重量 Kg(lbs)
CST-162A AC-**-A	3/8	0.16 (0.35 lbs)
	SAE6	
CST-162A AC-**-B	1/4	
	SAE4	







Appendices-B
附錄-B

MAX.PRESSURE	3600 psi (250 bar)

FEATURES

Note: The maximum allowable pressure for the standard aluminum-alloy valves is 250 bar; we also supply the nodular ductile-iron valves; contact our factory for details
註:標準閥塊鋁合金最大壓力250bar，另提供球墨鑄鐵閥塊,請聯繫工廠。