


◆ MODEL 型 式

HWV

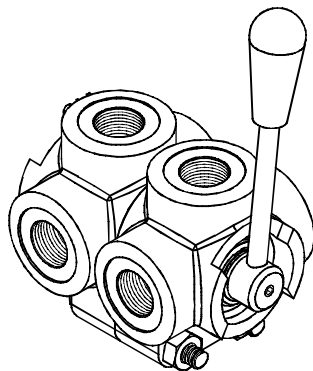

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
HVW-380	315 (4569 psi)	50 (13.20 gpm)	2.8(6.3 lbs)
HVW-120	280 (4061 psi)	80 (21.13 gpm)	
HVW-340	220 (3190 psi)	120 (31.70 gpm)	3.6(8 lbs)
HVW-100	220 (3190 psi)	180 (47.55 gpm)	
Fluid Type 流體型式		ISO VG 32 , 46 , 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638.10	

◆ HOW TO ORDER 編號說明

1	2	3
HWV	380	*

1 VALVE SERIES 系列名稱

HWV = Manually Operated Directional Valves 手動換向閥

2 SUBPLATE MOUNTING SIZE 稱呼口徑

380 = G 3/8 **380A** = 3/4-16UNF (SAE8)
120 = G 1/2 **120A** = 7/8-14UNF (SAE10)
340 = G 3/4 **340A** = 1 1/16-12UNF (SAE12)
100 = G 1 **100A** = 1 5/16-12UNF (SAE16)

3 SPOOL TYPE 主軸型式

None	Normally Open 常開
O	Normally Close 常閉

◆ DIMENSIONS 外型尺寸圖

Model Size 尺寸		Model 型式 HVW-380	HVW-120	HVW-340	HVW-100
A		24	(0.95")	26.5	(1.04")
B		122.8	(4.83")	130.4	(5.13")
C		173.4	(6.83")	180.7	(7.11")
D		85	(3.35")	99.4	(3.91")
E		36	(1.42")	42	(1.65")
F		37.5	(1.47")	44.6	(1.76")
G		75	(2.95")	90	(3.54")
H		M8		M10	
I	G	G3/8	G1/2	G3/4	G1
	SAE	3/4-16 UNF	7/8-14 UNF	1 1/16-12 UNF	1 5/16-12 UNF

* The handle can be assembled on either side according to user's preference.
把手可依使用者喜好自行按裝另一邊。

