


MODEL 型 式

VRBP-03




DESCRIPTION 說明

The T-8A control option allows a pilot control valve to be incorporated directly into the end of the modulating element via the T-8A cavity. These pilot control cartridges are sold separately and include electro-proportional, solenoid, air pilot, and hydraulic pilot operation.

T-8A控制是用導壓級控制閥直接插在減壓閥六角頭上的T-8A插孔中,導壓級控制閥需單獨訂購包括比例閥、電磁閥、氣導和液導。

PERFORMANCE 特性曲線

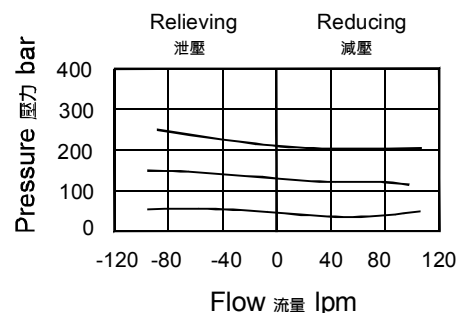

SPECIFICATIONS 規 格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VRBP-03	350 (5076 psi)	80 (21.13 gpm)	0.30 (0.66 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)	
Contamination Level 污染標準		ISO4406. 20/18/15 NAS1638. 9	

HOW TO ORDER 編號說明

1	2	3
VRBP	03	*

1 VALVE SERIES 系列名稱

VRBP= Cartridge Type Reducing / Relieving Valves (Pilot Operated Type, With Integral T-8A Control Cavity)

插入式減泄壓閥(導壓式,帶集成T-8A控制插孔)

2 SUBPLATE MOUNTING SIZE 稱呼口徑

03 :T-2A

Cavity 孔口:CST-2A


See Appendices-A 見附錄A

For Manifold See Appendices-B 油路板見附錄B

3 MINIMUM CONTROL PRESSURE 最低控制壓力

17	1.7 bar (25psi)
70	7.0 bar (100psi)

CONTROL PORT(S) 動作形式

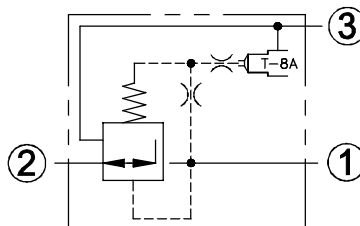

DIMENSIONS 外型尺寸圖

