



◆ **MODEL 型 式**
VFD-10

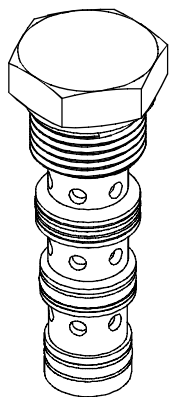

◆ **PERFORMANCE 特性曲線**

Test Conditions 測試條件
Oil Temperature 油溫度: 50°C (122°F)
Viscosity 黏性: 35 cSt (163 SSU)

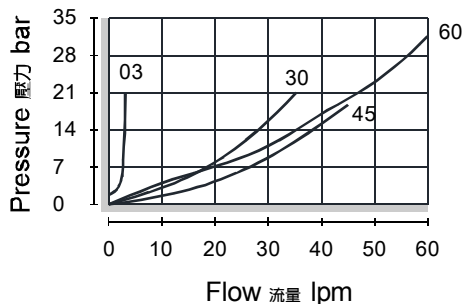

◆ **SPECIFICATIONS 規 格**

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VFD-10	350 (5076 psi)	60 (15.85 gpm)	0.15 (0.33 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)	
Contamination Level 污染標準		ISO4406. 20/18/15 NAS1638. 9	

◆ **HOW TO ORDER 編號說明**

1	2	3	4
VFD	10	— 45	— *

1 VALVE SERIES 系列名稱
VFD = Flow Divider Valves 分流閥

2 SUBPLATE MOUNTING SIZE 稱呼口徑
Size: 10
Cavity 孔口: CS10A-4N
See Appendices-A 見附錄A
For Manifold See Appendices-B 油路板見附錄B

3 FLOW SPECIFICATIONS 流量規格

03: 1.2~3 l/min
07: 2.3~7.6 l/min
15: 4.5~15 l/min
22: 6.8~22.7 l/min
30: 9~30 l/min
37: 11~37 l/min
45: 13.5~45 l/min
60: 24~60 l/min


Division ratio: 50% - 50%
分流比例

Flow Accuracy: 3% ~ 10%
分流精度

4 SEALS 密封件

Non: NBR (Standard) 無記號: 丁腈橡膠(標準型)
HN: HNBR 氫化丁腈橡膠
V: VITON 氟橡膠

◆ **CONTROL PORT(S) 動作形式**



◆ **DIMENSIONS 外型尺寸圖**

