



◆ MODEL 型 式 VCK-03

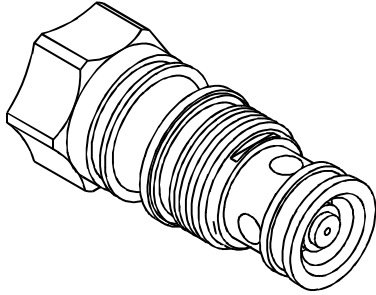

◆ PERFORMANCE (Cartridge Only) 特性曲線

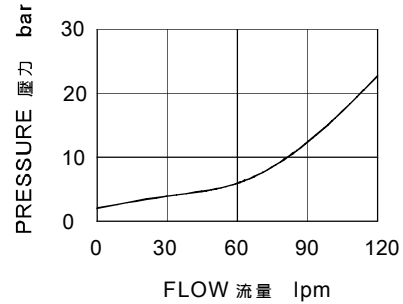

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Pilot Ratio 引導比例	Maximum Flow 最大流量 lpm	Weight 重量 Kg
VCK-03	350 (5076 psi)	3:1	120 (31.7 gpm)	0.23 (0.51 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68		
Viscosity 黏性 cSt		10~400 (59~1854 SSU)		
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)		
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10		

◆ HOW TO ORDER 編號說明

1	2	3	4
VCK	03	3A	20

1 VALVE SERIES 系列名稱
VCK= CARTRIDGE PILOT OPERATED CHECK VALVES
插入式引導止逆閥


2 SUBPLATE MOUNTING SIZE: 稱呼口徑

03 : T-2A
Cavity 孔口 : CST-2A
See Page Appendixes-A_006
見附錄A_006 頁面

3 PILOT RATIO 引導比例
3A : 3:1

4 BIAS SPRING 開啓壓力
03 : 0.3 bar (4psi)
05 : 0.5 bar (7psi)
20 : 2 bar (29psi)
50 : 5 bar (73psi)
70 : 7 bar (102psi)

◆ CONTROL PORT(S) 動作形式



◆ DIMENSIONS 外型尺寸圖

