



◆ MODEL 型 式

VCX-10

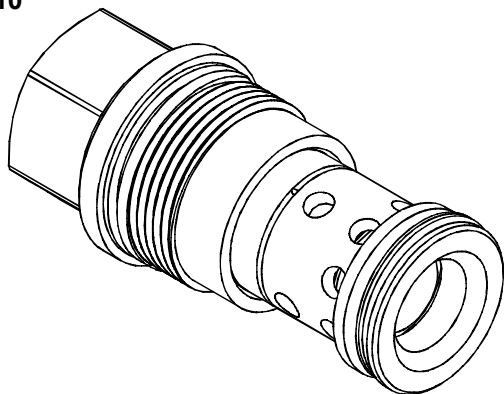

◆ PERFORMANCE (Cartridge Only)

特性曲線

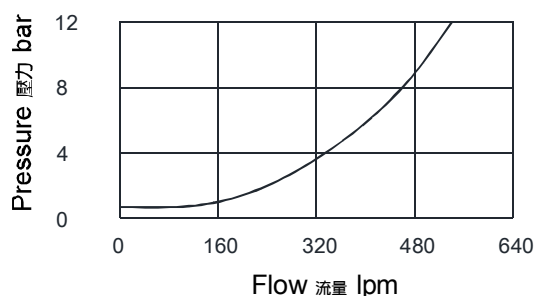

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VCX-10	350 (5076 psi)	640 (169.07 gpm)	1.3 (2.87 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)	
Contamination Level 污染標準		ISO4406. 20/18/15 NAS1638. 9	

◆ HOW TO ORDER 編號說明

1	2	3
VCX	10	05

1 VALVE SERIES 系列名稱

VCX= Check Valves 止逆閥

2 PORTING 閥口

10 : T-18A

Cavity 孔口 : CST-18A

See Appendices-A 見附錄A

For Manifold See Appendices-B 油路板見附錄B

3 CRACKING PRESSURE 開啓壓力

03 : 0.3 bar (4.35psi)


05 : 0.5 bar (7psi)

20 : 2 bar (29psi)

50 : 5 bar (73psi)

120 : 12 bar (174psi)

◆ CONTROL PORT(S) 動作形式



◆ DIMENSIONS 外型尺寸圖

