


◆ **MODEL 型 式**
VLS-08

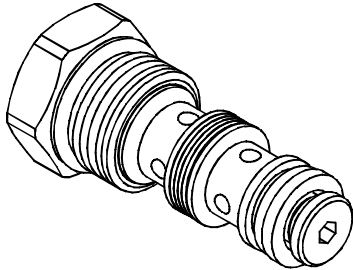


◆ **DESCRIPTION 說明**

Shuttle Valves, cartridge-style hydraulic check valve, for use in blocking circuits where a priority of flow/direction is given to a higher pressure circuit over a lower one.

梭動閥，插入式油壓止逆閥，在流量/方向被優先供應至較高的壓力迴路時，用於阻擋低壓迴路。

◆ **PERFORMANCE 特性曲線**
(Cartridge Only)

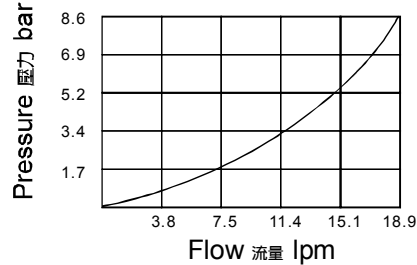

◆ **SPECIFICATIONS 規 格**

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VLS-08	350 (5076psi)	19 (5.02 gpm)	0.07 (0.15 lbs)
Fluid Type 流體型式		ISO VG 32 , 46 , 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)	
Contamination Level 污染標準		ISO4406. 20/18/15 NAS1638. 9	

◆ **HOW TO ORDER 編號說明**

1	2
VLS	08


1 VALVE SERIES 系列名稱

VLS= Cartridge Shuttle Valves
插入式梭動閥

2 PORTING 閥口

Size: 08
Cavity 孔口: CS08-3N
See Appendices-A 見附錄A
For Manifold See Appendices-B 油路板見附錄B

◆ **CONTROL PORT(S) 動作形式**



◆ **DIMENSIONS 外型尺寸圖**

