



◆ **MODEL 型 式**  
VSV10-32S



◆ **PERFORMANCE 特性曲線**

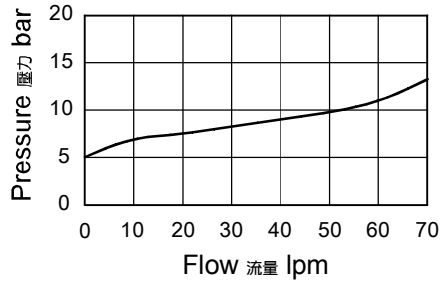

◆ **SPECIFICATIONS 規 格**

Model Number 型號	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
VSV10-32S	350 (5076 psi)	70 (18.49 gpm)	0.5 (1.10 lbs)
<b>Fluid Type 流體型式</b>		ISO VG 32, 46, 68	
<b>Viscosity 黏性 cSt</b>		10~400 (59~1854 SSU)	
<b>Operating Temperature 操作溫度 °C</b>		-30~100 (-22~212°F)	
<b>Contamination Level 污染標準</b>		ISO4406. 20/18/15 NAS1638. 9	

◆ **HOW TO ORDER 編號說明**

<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>
VSV	10	— 32S —	A2	— X —	Y


**1 VALVE SERIES 系列名稱**

VSV=Cartridge Type Solenoid Operated Check Valves (Speed)  
插入式電磁止逆閥(快速型)

**2 SUBPLATE MOUNTING SIZE 稱呼口徑**

Size : 10  
Cavity 孔口: CS10-2N  
See Appendices-A 見附錄A  
For Manifold See Appendices-B 油路板見附錄B

**3 CONTROL PORT(S) 動作形式**



**4 TYPE OF COIL 線圈類型**

Non : Without Coil 無記號:無線圈  
A1 : RAC110V 60/50HZ      D1 : DC12V  
A2 : RAC220V 60/50HZ      D2 : DC24V

**5 WIRING TYPE 接線型式**

Non:WIRING BOX TYPE(DIN)      X : DOUBLE LEAD  
無:接線盒式(DIN)                  雙接線方式



※ For more technical information of wiring type please refer to the Appendices-D or contact with us.  
接線型式的詳細技術資料請查附錄-D或與我們聯繫。


**6 ADJUSTMENT OPTION 調整選擇**

<b>Non</b>		<b>Y</b>	
Non:Standard 無記號:標準型		Y:Twist Style Manual Override 旋緊型— 手動操作復位	

● Internal Leakage: max of 0.15 cc/min (3 drops/min) at 350 bar (5076 psi).  
內部洩漏:在350bar(5076psi)時,最大為0.15毫升/分鐘(3滴/分鐘)。

◆ **TECHNICAL DATA 技術數據**

The only difference between this valve and the standard model is a spring placed between pilot section and poppet. 該閥與標準閥的唯一區別是在先導部份和提動閥之間的彈簧。 This design allows faster response times with very small flow or even virtually zero flow. 這樣的設計在低流量甚至零流量時實現更快的響應時間。 A pressure of approximately 4 bar (58 psi) is required to open the main poppet. 主閥的開啓壓力約為 4 bar (58 psi).

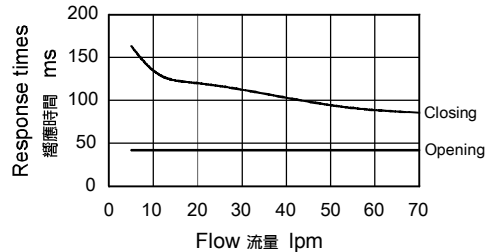

◆ **DIMENSIONS 外型尺寸圖**

