


◆ **MODEL** 型 式

VHP-10

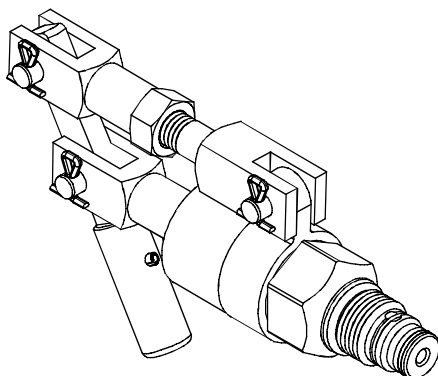

◆ **PERFORMANCE**(Cartridge Only)

特性曲線


Pump Selection Chart 泵選擇表

Max. Operating Pressure: 207 bar

最大操作壓力

Max. Hand Force: 305 Nm

最大手柄作用力

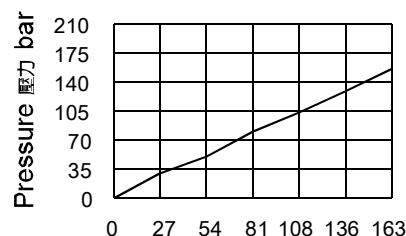

Operator Handle Force Nm

操作人員手柄作用力

◆ **SPECIFICATIONS** 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Operating Pressure 操作壓力 bar	Displacement (Per stroke) 排量(每冲程) cc	Weight 重量 Kg
VHP-10	350 (5076 psi)	210 (3046 psi)	10.6 (0.65 cu in.)	1.15 (2.54 lbs)
Fluid Type 流體型式		ISO VG 32 , 46 , 68		
Viscosity 黏性 cSt		10~400 (59~1854 SSU)		
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)		
Contamination Level 污染標準		ISO4406. 20/18/15 NAS1638. 9		

◆ **HOW TO ORDER** 編號說明

1	2	3
VHP	10	A

1 VALVE SERIES 系列名稱

VHP = Cartridge Type Hand Pump

插入式手動泵

2 SUBPLATE MOUNTING SIZE 稱呼口徑

SIZE : 10

Cavity 孔口 : CS10-2N

See Appendices-A 見附錄A


For Manifold See Appendices-B 油路板見附錄B

3 OPERATOR TYPE 操作型式

A : Push Handle Actuation

推式手柄驅動裝置

◆ **CONTROL PORT(S)** 動作形式



◆ **DIMENSIONS** 外型尺寸圖

